


FILSTAR PU PAT (Pattent Applied for)

pump unit

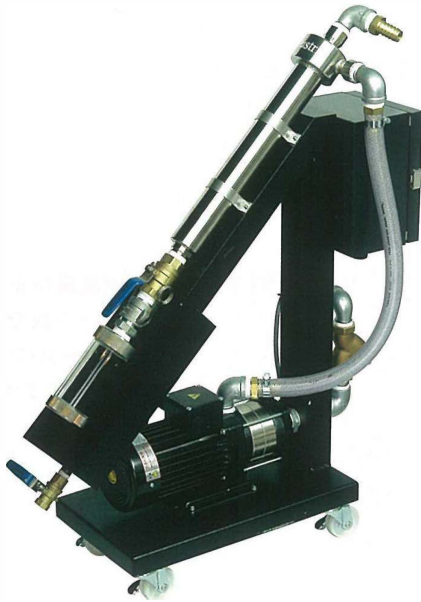


仕様


- Can be retrofit to the existing coolant tank of machine.
- Includes a **drain cup** to capture all collected sludge
- **Compact design** (200mm×900mm×1,000mm)
- Filtration accuracy: collect more than **90% of 10 micron to 4mm particles**
- Processing flow rate : available from 15L to 50L

Filstar All-In-One Pump Unit Package

The only requirement for installation is connecting the IN and OUT to the existing tanks. Filstar will start to perform its high precision work immediately. The unit comes with a drain cup. No maintenance will be required!!

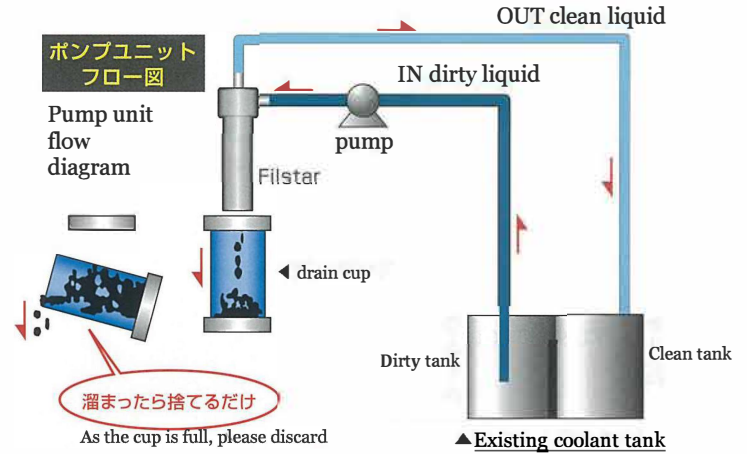

The dirty liquid intake, 10 micron level filtration, clean liquid discharge, capturing sludge, all these functions will work after only turning on power. All automated unit, **ALL-IN-ONE!**

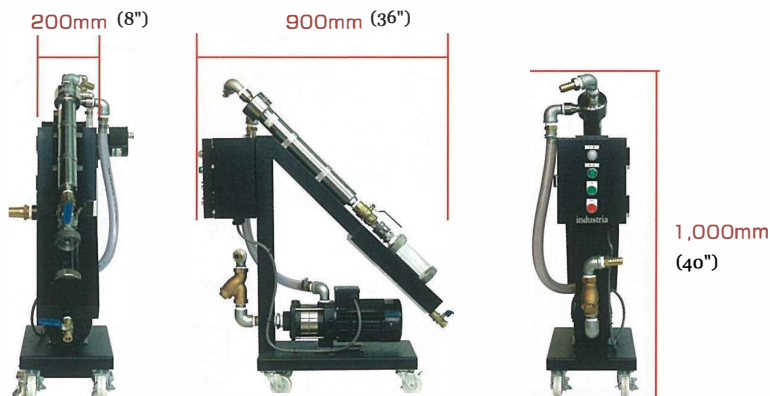

仕 様 Specification	Part Number	TKS15-PU	TKSS20-PU	TKSM25-PU
処理 Processing Flow		15~20L/min	20~30L/min	30~50L/min
濾過サイズ Filtering size		10μm~2mm	10μm~3mm	10μm~4mm
配管サイズ Pipe Size		15A	20A	25A
外形サイズ Outer Dimensions		200mm×900mm×1,000mm (8" x 36" x 40")		
駆動電源 Driving Power Supply		AC100V50/60 or AC200V50/60		
対称液 Liquid Type		水溶性切削油、洗浄水、水(粘性の低い液体) Water-base cutting oil, washing liquid, water (low viscosity liquid)		

PU