

TK Cyclonic Filter Model Selection Form




Contact Name	Company name
TEL	Address

<Basic Specification>

Contents	Customer Requirements
1. Installation Timing	
2. Application	
3. Issue	
4. Processing Flow Rate	Liter per minute
5. Salvaging Material	Material Name:
6. Degree of Precision	% of μ

7. Installation customer is planning for machine

For example

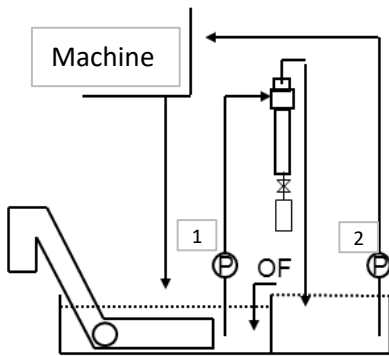

※Please draw a simple diagram of machines in which you intend to install FILSTAR.

CAUTION: Recommended Pressure Drop=above 29 psi (0.2Mpa)

▲ P=Pressure Gauge (Inlet of Filstar)-Pressure Gauge (Outlet of Filstar)
Pressure Drop=▲ P

Pump model 1 #: CRN5-6 A-FGJ-G-V-HQQV

Pump model 2 #: SPK8-5/5 A-WB-A-RUUV

Pump model 1 #:

Flow Rate:

Pump model 2 #:

Flow Rate:

Pump model 3 #:

Flow Rate:

<Other requests>

TEL:+1-630-917-9258

masa.fukuda@takachiho-america.com