


250 Series

RoHS Compliant

- 3 Member
- 1" Over travel
- C Lock (Option)
- With Sequential motion in front direction (Option)

Specification

- Material / High tensile strength aluminium
- Finish / Rigid alumite treatment
- Slide space / 19.0mm, Height / 70.0mm
- Load rating / 188~260lbs. (85~118kg)
- Mounting hole / $\phi 5.3 \times \phi 10.6 \times 90^\circ$ Counter sink
- Common in L / R

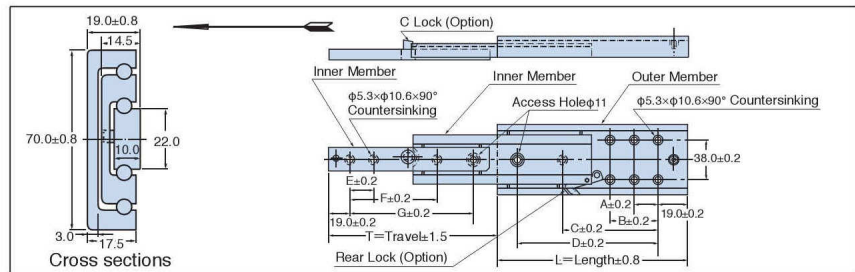

PART No.	Length L	Travel T	250 Series Mounting holes (mm)							Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	
250-12	304.8(12")	330.2(13")	98.0	-	-	254.0	50.8	177.8	254.0	230 (104)
250-14	355.6(14")	381.0(15")	127.0	-	-	304.8	76.2	203.2	304.8	234 (106)
250-16	406.4(16")	431.8(17")	76.2	152.4	254.0	355.6	101.6	228.6	355.6	243 (110)
250-18	457.2(18")	482.6(19")	76.2	152.4	279.4	406.4	127.0	279.4	406.4	254 (115)
250-20	508.0(20")	533.4(21")	98.0	203.2	330.2	457.2	152.4	304.8	457.2	260 (118)
250-22	558.8(22")	584.2(23")	98.0	203.2	355.6	508.0	177.8	330.2	508.0	260 (118)
250-24	609.6(24")	635.0(25")	127.0	254.0	406.4	558.8	177.8	381.0	558.8	256 (116)
250-26	660.4(26")	685.8(27")	127.0	254.0	431.8	609.6	203.2	406.4	609.6	238 (108)
250-28	711.2(28")	736.6(29")	152.4	304.8	482.6	660.4	228.6	431.8	660.4	221(100)
250-30	762.0(30")	787.4(31")	152.4	304.8	508.0	711.2	228.6	482.6	711.2	208 (94)
250-32	812.8(32")	838.2(33")	177.8	355.6	558.8	762.0	254.0	508.0	762.0	199 (90)
250-34	863.6(34")	889.0(35")	177.8	355.6	584.2	812.8	279.4	533.4	812.8	192 (87)
250-36	914.4(36")	939.8(37")	203.2	406.4	635.0	863.6	279.4	584.2	863.6	188 (85)


350 Series

RoHS Compliant

- 3 Member
- 1" Over travel
- E Lock (Option)
- With Sequential motion in front direction (Option)

Specification

- Material / High tensile strength aluminium
- Finish / Rigid alumite treatment
- Slide space / 25.4mm, Height / 89.0mm
- Load rating / 331~375lbs. (150~170kg)
- Mounting hole / $\phi 5.3 \times \phi 10.6 \times 90^\circ$ Counter sink
- Common in L / R

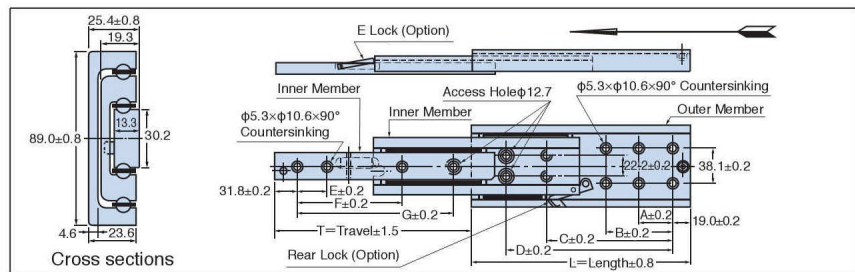

PART No.	Length L	Travel T	350 Series Mounting holes (mm)							Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	
350-12	304.8(12")	279.4(11")	101.6	-	-	254.0	-	127.0	228.6	342 (155)
350-14	355.6(14")	330.2(13")	127.0	-	-	304.8	76.2	177.8	279.4	353 (160)
350-16	406.4(16")	381.0(15")	76.2	152.4	254.0	355.6	101.6	203.2	330.2	364 (165)
350-18	457.2(18")	431.8(17")	76.2	152.4	279.4	406.4	127.0	254.0	381.0	371 (168)
350-20	508.0(20")	482.6(19")	101.6	203.2	330.2	457.2	127.0	279.4	431.8	375 (170)
350-22	558.8(22")	533.4(21")	101.6	203.2	355.6	508.0	152.4	304.8	482.6	375 (170)
350-24	609.6(24")	584.2(23")	127.0	254.0	406.4	558.8	177.8	355.6	533.4	371 (168)
350-26	660.4(26")	635.0(25")	127.0	254.0	431.8	609.6	177.8	381.0	584.2	364 (165)
350-28	711.2(28")	685.8(27")	152.4	304.8	482.6	660.4	203.2	406.4	635.0	353 (160)
350-30	762.0(30")	736.6(29")	152.4	304.8	508.0	711.2	228.6	457.2	685.8	349 (158)
350-32	812.8(32")	787.4(31")	177.8	355.6	558.8	762.0	228.6	482.6	736.6	344 (156)
350-34	863.6(34")	838.2(33")	177.8	355.6	584.2	812.8	254.0	508.0	787.4	340 (154)
350-36	914.4(36")	889.0(35")	203.2	406.4	635.0	863.6	279.4	558.8	838.2	331 (150)