


1300S Series

RoHS Compliant


- 2 Member
- 3/4 travel

Specification

- Material / SUS304
- Slide space / 6.4mm, Height / 14.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M2.6 burring tap, $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

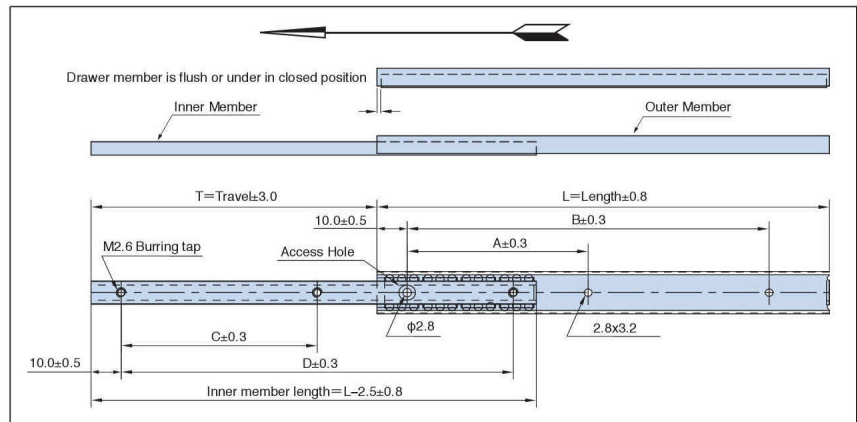

PART No.	Length L	Travel T	1300S Series Mounting Holes (mm)				Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D		
1300S-70	70	40.1	—	50	—	50	0.020	22 (10)
1300S-100	100	70.1	40	70	40	80	0.029	22 (10)
1300S-125	125	82.4	50	95	50	105	0.035	22 (10)
1300S-150	150	94.7	60	120	65	130	0.040	22 (10)


1400S Series

RoHS Compliant


- 3 Member
- Full Extension

Specification

- Material / SUS304
- Slide space / 12.8mm, Height / 14.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

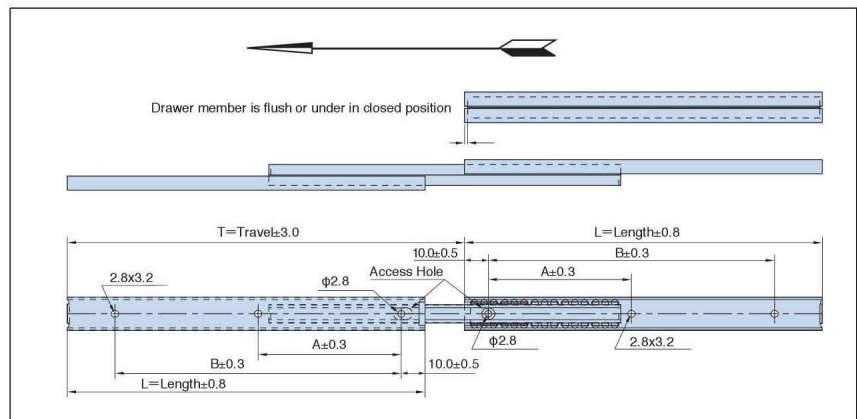

PART No.	Length L	Travel T	1400S Series Mounting Holes (mm)		Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B		
1400S-70	70	82.7	—	50	0.040	22 (10)
1400S-100	100	117.3	40	70	0.055	22 (10)
1400S-125	125	141.9	50	95	0.069	22 (10)
1400S-150	150	166.5	60	120	0.082	22 (10)



1395S Series

RoHS Compliant

- 2 Member
- Front / Rear Travel

Specification

- Material / SUS304
- Slide space / 6.4mm, Height / 14.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M2.6 burring tap
 $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R

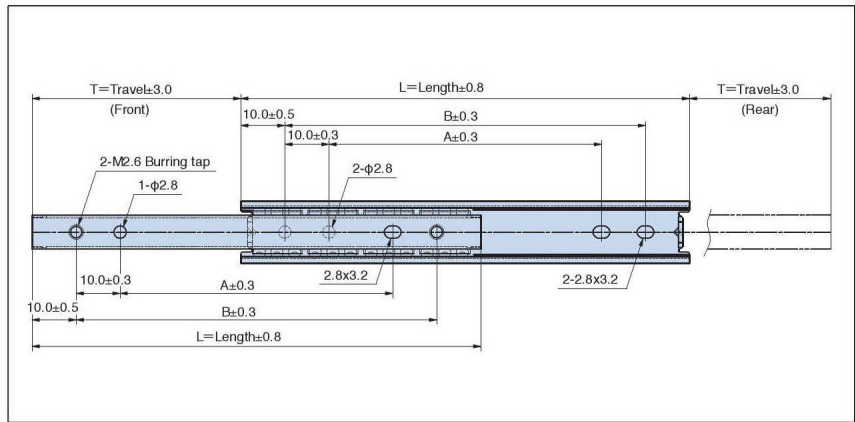

Cross sections

PART No.	Length L	Travel T	1395S Series Mounting Holes (mm)		Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B		
1395S-70	70	17.2	30	50	0.020	22 (10)
1395S-100	100	21.8	60	80	0.030	22 (10)
1395S-125	125	34.1	85	105	0.035	22 (10)
1395S-150	150	59.1	110	130	0.045	22 (10)



1595S Series

RoHS Compliant

- 2 Member
- Front / Rear Travel
- Screw: M2.6 pan head screw

Specification

- Material / SUS304
- Slide space / 7.5mm, Height / 16.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M3 burring tap,
 $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R

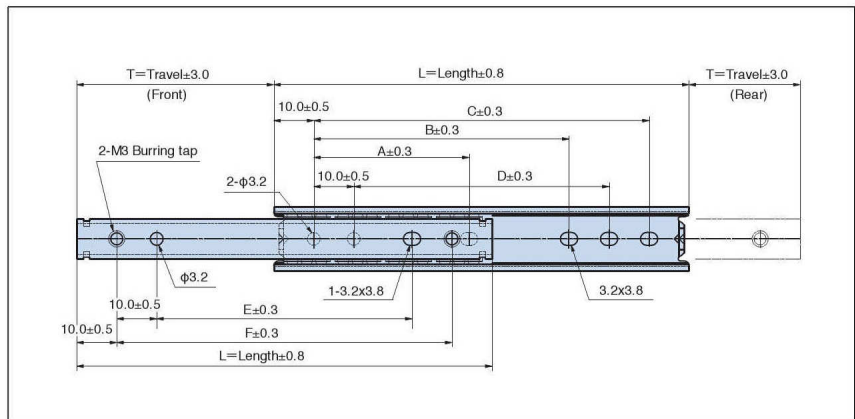

Cross sections

PART No.	Length L	Travel T	1595S Series Mounting Holes (mm)						Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D	E	F		
1595S-70	70	15.4	—	—	50	30	30	50	0.03	22 (10)
1595S-100	100	20.0	—	—	80	60	60	80	0.04	22 (10)
1595S-125	125	32.3	—	—	105	85	85	105	0.05	22 (10)
1595S-150	150	44.6	—	—	130	110	110	130	0.06	22 (10)
1595S-200	200	69.2	50	130	180	160	160	180	0.08	22 (10)



1500S Series

RoHS Compliant

- 2 Member
- 3/4 travel

Specification

- Material / SUS304
- Slide space / 7.5mm, Height / 16.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M3 burring tap
 $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R

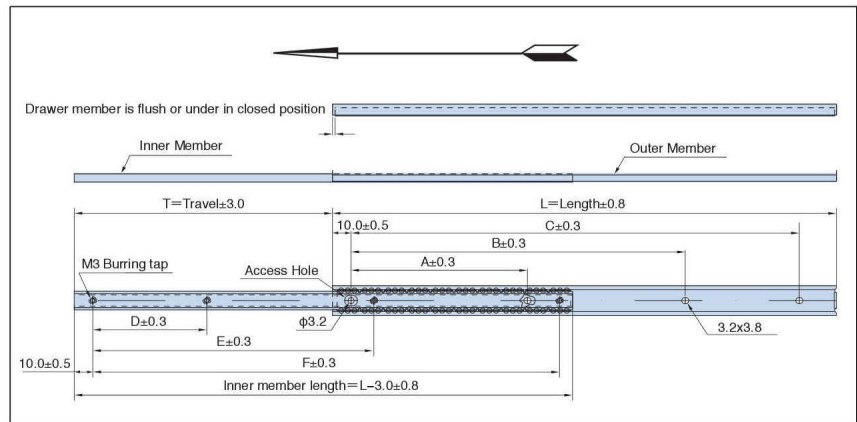

Cross sections

PART No.	Length L	Travel T	1500S Series Mounting Holes (mm)						Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D	E	F		
1500S-70	70	39.3	—	—	50	—	—	50	0.027	22 (10)
1500S-100	100	69.3	—	40	70	40	—	80	0.037	22 (10)
1500S-125	125	81.6	—	50	95	50	—	105	0.046	22 (10)
1500S-150	150	93.9	—	60	120	65	—	130	0.057	22 (10)
1500S-200	200	118.5	—	95	170	90	—	180	0.076	22 (10)
1500S-250	250	143.1	80	150	220	80	160	230	0.095	22 (10)
1500S-300	300	167.7	95	180	270	90	180	280	0.115	22 (10)



1600S Series

RoHS Compliant

- 3 Member
- Full Extension

Specification

- Material / SUS304
- Slide space / 15.0mm, Height / 16.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R

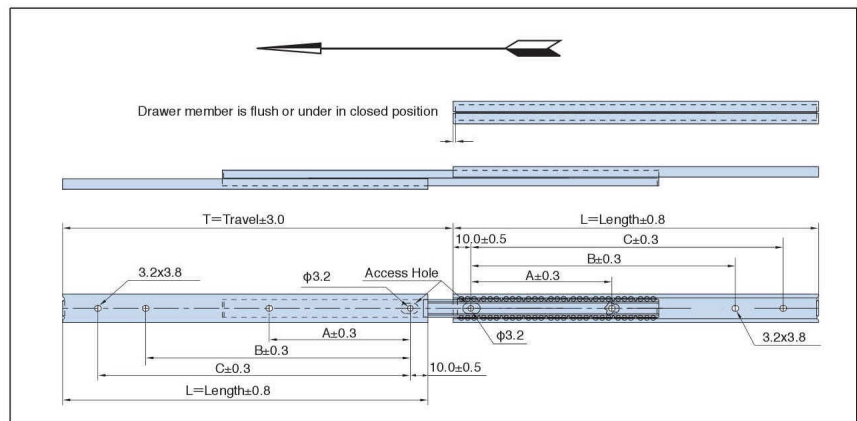

Cross sections

PART No.	Length L	Travel T	1600S Series Mounting Holes (mm)			Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C		
1600S-70	70	80.6	—	—	50	0.027	22 (10)
1600S-100	100	115.2	—	40	70	0.037	22 (10)
1600S-125	125	139.8	—	50	95	0.046	22 (10)
1600S-150	150	164.4	—	60	120	0.057	22 (10)
1600S-200	200	213.6	—	95	170	0.076	22 (10)
1600S-250	250	262.8	80	150	220	0.095	22 (10)
1600S-300	300	300	95	180	270	0.115	22 (10)



2000S Series

RoHS Compliant

- 3 Member
- Full Extension

Specification

- Material / SUS304
- Slide space / 10.5mm, Height / 20.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R

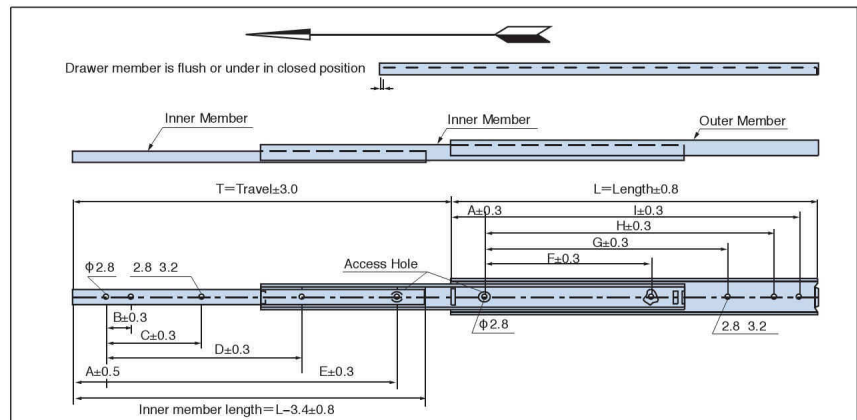

PART No.	Length L	Travel T	2000S Series Mounting Holes (mm)									Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	H	I		
2000S-70	70	81.0	10	—	—	—	50	—	—	50	—	0.045	22 (10)
2000S-100	100	115.6	10	—	40	—	80	—	40	80	—	0.065	22 (10)
2000S-125	125	140.2	20	—	40	—	80	—	40	80	—	0.082	22 (10)
2000S-150	150	164.8	20	—	50	—	110	—	50	110	—	0.098	22 (10)
2000S-200	200	214.0	20	15	60	—	160	—	100	145	160	0.132	22 (10)
2000S-250	250	263.2	20	15	60	160	210	50	145	195	210	0.165	22 (10)
2000S-300	300	312.4	20	15	100	160	260	100	160	245	260	0.200	22 (10)


[CAUTION] Length of Screw

Our microrails have extruded screw holes in order for customer to be able to assemble slide rail from one side (except for full extension types: 2000S, 1400S, 1600S).

If long screws were to be used, it would interfere with retainer or slide rail stopper, and it may cause damage.

Please make sure the length of screw before use. Recommended length of screw could be determined as following calculation.

$$\text{Recommended length of screw (L)} = (t) + (A) + (1 \sim 1.5) \text{ mm}$$

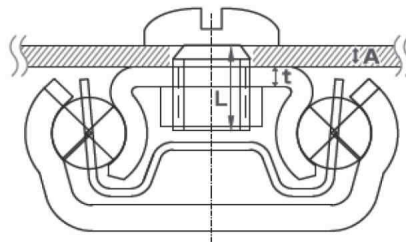

- Length of screw(L)
- Thickness of inner member(t)
1300S, 1400S: $t=0.8$ mm
1500S, 1600S: $t=1.0$ mm
- Thickness of object such as drawer (A)