


5500 Series

RoHS Compliant

- 3 Member
- Over travel

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 16.0mm, Height / 54.8mm
- Load rating / 159~220lbs. (72~100kg)
- Mounting hole / $\phi 4.5$, 4.5×5.3
- Common in L / R

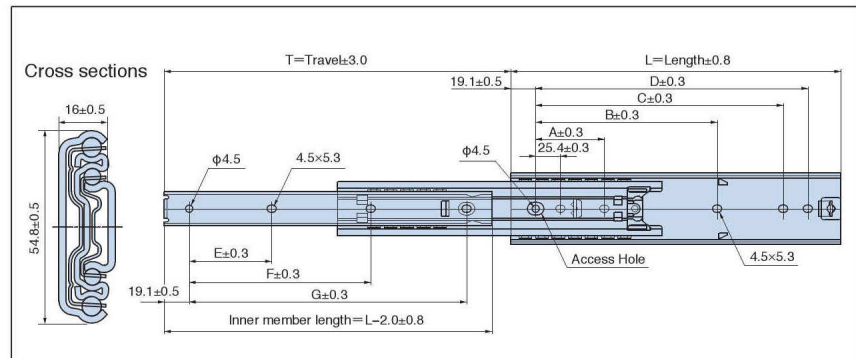

PART No.	Length L	Travel T	5500 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
5500-12	304.8(12")	330(13")	76.2	190.5	241.3	260.3	76.2	177.8	258.3	0.84	15	159(72)
5500-14	355.6(14")	381(15")	88.9	215.9	292.1	311.1	101.6	203.2	309.1	0.99	15	170(77)
5500-16	406.4(16")	432(17")	127.0	241.3	342.9	361.9	127.0	228.6	359.9	1.13	15	183(83)
5500-18	457.2(18")	483(19")	127.0	292.1	393.7	412.7	127.0	279.4	410.7	1.28	15	200(91)
5500-20	508.0(20")	533(21")	152.4	317.5	444.5	463.5	152.4	304.8	461.5	1.43	15	216(98)
5500-22	558.8(22")	584(23")	177.8	342.9	495.3	514.3	177.8	330.2	512.3	1.58	15	220(100)
5500-24	609.6(24")	635(25")	177.8	393.7	546.1	565.1	177.8	381.0	563.1	1.73	15	216(98)
5500-26	660.4(26")	686(27")	203.2	419.1	596.9	615.9	203.2	406.4	613.9	1.88	15	216(98)

5800 Series


RoHS Compliant

- 3 Member
- 1" Over travel
- With Sequential motion
(in front direction)

Long size available

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 16.0mm, Height / 63.0mm
- Load rating / 177~298lbs. (80~135kg)
- Mounting hole / $\phi 5.3$, 5.5×6.3
- Common in L / R

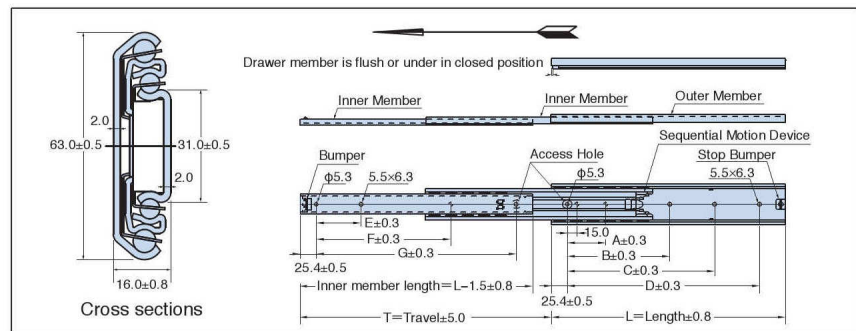

PART No.	Length L	Travel T	5800 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
5800-12	304.8(12")	331.0(13")	127.0	-	-	254.0	84.6	169.4	254.0	0.97	12	177(80)
5800-14	355.6(14")	381.0(15")	152.4	-	-	304.8	101.6	203.2	304.8	1.1	12	199(90)
5800-16	406.4(16")	432.0(17")	88.9	177.8	266.7	355.6	118.6	237.0	355.6	1.36	12	241(109)
5800-18	457.2(18")	483.0(19")	101.6	203.2	304.8	406.4	135.4	271.0	406.4	1.50	12	254(115)
5800-20	508.0(20")	534.0(21")	114.3	228.6	342.9	457.2	152.4	304.8	457.2	1.67	12	276(125)
5800-22	558.8(22")	585.0(23")	127.0	254.0	381.0	508.0	169.4	338.6	508.0	1.84	12	276(125)
5800-24	609.6(24")	635.0(25")	139.7	279.4	419.1	558.8	186.2	372.6	558.8	2.00	6	276(125)
5800-26	660.4(26")	686.0(27")	152.4	304.8	457.2	609.6	203.2	406.4	609.6	2.21	6	298(135)
5800-28	711.2(28")	737.0(29")	165.1	330.2	495.3	660.4	220.2	440.2	660.4	2.33	6	276(125)
5800-30	762.0(30")	788.0(31")	177.8	355.6	533.4	711.2	237.0	474.2	711.2	2.36	6	221(100)

9800 Series


RoHS Compliant

- 3 Member
- Equal travel

UNDER DEVELOPMENT

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 19.8mm, Height / 69.8mm
- Load rating / 398lbs. (180kg)
- Mounting hole / $\phi 5.2$, $\phi 6.6$, $\phi 7.1$,
12.7 $\times$ 6.6, 15.9 $\times$ 6.6, 5.2 $\times$ 9.5
- Common in L / R

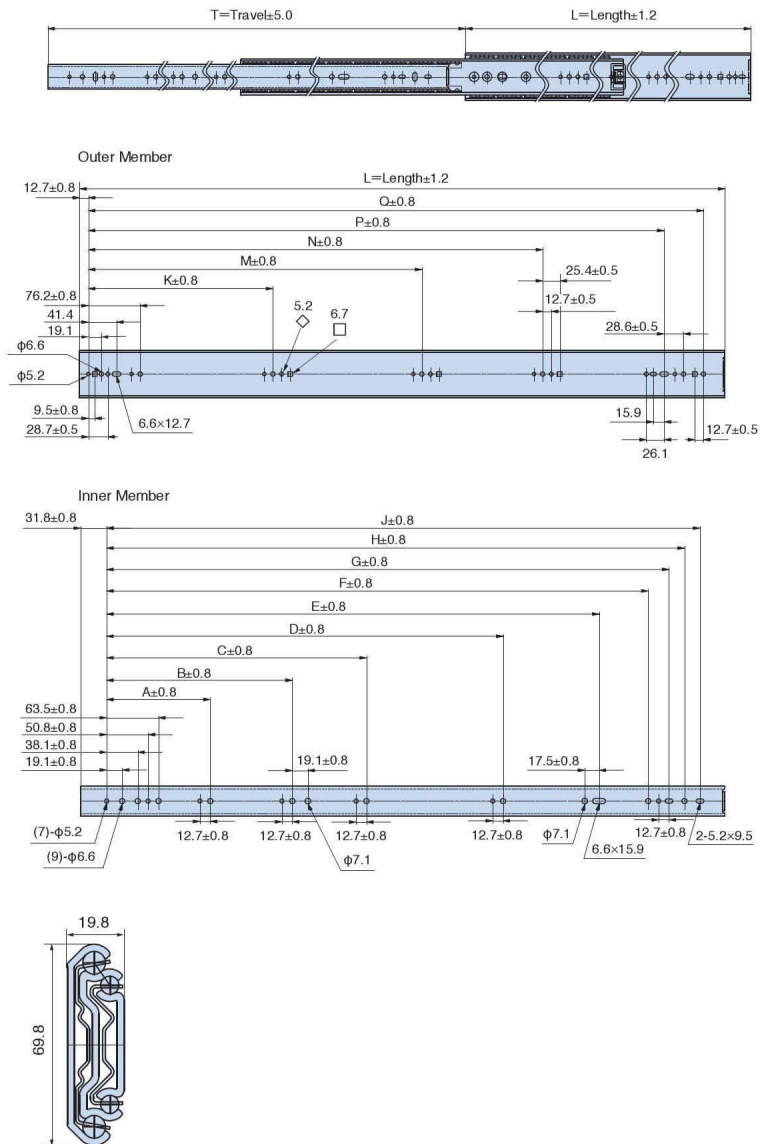

Cross sections

PART No.	Length L	Travel T	9800 Series Mounting holes (mm)														Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	H	J	K	M	N	P	Q			
9800-20	508.0 (20")	508.0 (20")	127.0	190.5	—	—	296.9	357.1	382.5	401.6	420.6	—	—	—	406.4	463.6	2.40	6	397(180)
9800-22	558.8 (22")	559.0 (22")	127.0	190.5	—	—	347.7	407.9	433.3	452.4	471.4	—	—	—	457.2	514.4	2.65	6	397(180)
9800-24	609.6 (24")	610.0 (24")	127.0	190.5	—	—	398.5	458.7	484.1	503.2	522.2	—	—	—	508.0	565.2	2.90	6	397(180)
9800-26	660.4 (26")	660.0 (26")	127.0	190.5	—	—	449.3	509.5	534.9	554.0	573.0	—	—	—	558.8	616.0	3.01	6	397(180)
9800-28	711.2 (28")	711.0 (28")	127.0	190.5	—	—	500.1	560.3	585.7	604.8	623.8	—	—	—	609.6	666.8	3.50	4	397(180)
9800-30	762.0 (30")	762.0 (30")	127.0	190.5	368.3	—	550.9	611.1	636.5	655.6	674.6	234.9	—	501.7	660.4	717.6	3.60	4	397(180)
9800-32	812.8 (32")	813.0 (32")	127.0	190.5	368.3	—	601.7	661.9	687.3	706.4	725.4	234.9	393.7	552.5	711.2	768.4	3.85	4	397(180)
9800-34	863.6 (34")	864.0 (34")	127.0	190.5	368.3	469.9	652.5	712.7	738.1	757.2	776.2	234.9	419.1	603.3	762.0	819.2	4.05	4	397(180)
9800-36	914.4 (36")	914.0 (36")	127.0	190.5	368.3	520.7	703.3	763.5	788.9	808.0	827.0	234.9	444.5	654.1	812.8	870.0	4.30	4	397(180)
9800-38	965.2 (38")	964.0 (38")	127.0	190.5	368.3	520.7	754.1	814.3	839.7	858.8	877.8	234.9	469.9	704.9	863.6	920.8	4.55	4	397(180)