














Cross sections and load ratings

Load rating range is based upon slide length. For more information, see the slide tables in this catalog.

ALU Microslides	Model 1530 series ■ 3/4 Extension ■ 9.9lbs./prs. [4.5kg]	
	Model 1540 series ■ Full Extension ■ 9.9lbs./prs. [4.5kg]	
Microslides	Model 1300S series ■ 3/4 Extension ■ 22lbs./prs. [10kg]	
	Model 1400S series ■ Full Extension ■ 22lbs./prs. [10kg]	
	Model 1500S series ■ 3/4 Extension ■ 22lbs./prs. [10kg]	
	Model 1600S series ■ Full Extension ■ 22lbs./prs. [10kg]	
	Model 2000S series ■ Full Extension ■ 22lbs./prs. [10kg]	
Light duty slides	Model 1700 series ■ 3/4 Extension ■ 33lbs./prs. [15kg]	
	Model 1800 series ■ Full Extension ■ 33lbs./prs. [15kg]	
	Model 2300 series ■ 3/4 Extension ■ 57lbs./prs. [26kg]	
	Model 2400 series ■ Full Extension ■ 82lbs./prs. [37kg]	
	Model 330 series ■ 3/4 Extension ■ 88lbs./prs. [40kg]	
Medium duty slides	Model 340 series ■ Full Extension ■ 106lbs./prs. [48kg]	
	Model 340QDA series ■ Full Extension ■ 106lbs./prs. [48kg]	

Medium duty slides	Model 2800 series ■ Full Extension ■ 75lbs./prs. [34kg]	
	Model 3800 series ■ Full Extension ■ 159lbs./prs. [72kg]	
Heavy duty slides	Model 5500 series ■ Full Extension ■ 220lbs./prs. [100kg]	
	Model 5800 series ■ Full Extension ■ 216lbs./prs. [98kg]	
	Model 9800 series ■ Full Extension ■ 398lbs./prs. [180kg]	
Heavy duty slides (Aluminium Slides)	Model 250 series ■ Full Extension ■ 260lbs./prs. [118kg]	
	Model 350 series ■ Full Extension ■ 375lbs./prs. [170kg]	

Specialty Slide Products	Model 1390S series ■ Linear Motion	
	Model 1590S series ■ Linear Motion	
	Model 1790 series ■ Linear Motion	
	Model 330LMM series ■ Linear Motion	
	Model R25 ■ Linear Motion	
	Model R40 ■ Linear Motion	


1530 Series

RoHS Compliant

- 2 Member
- 3/4 travel

Specification

- Material / Aluminum alloy
- Finish / Anodizing
- Slide space / 6.0mm, Height / 15.0mm
- Load rating / 8.8~9.9lbs. (4.0~4.5kg)
- Mounting hole / M2.5 · p0.45, $\phi 2.8 \times 3.2$
- Common in L / R

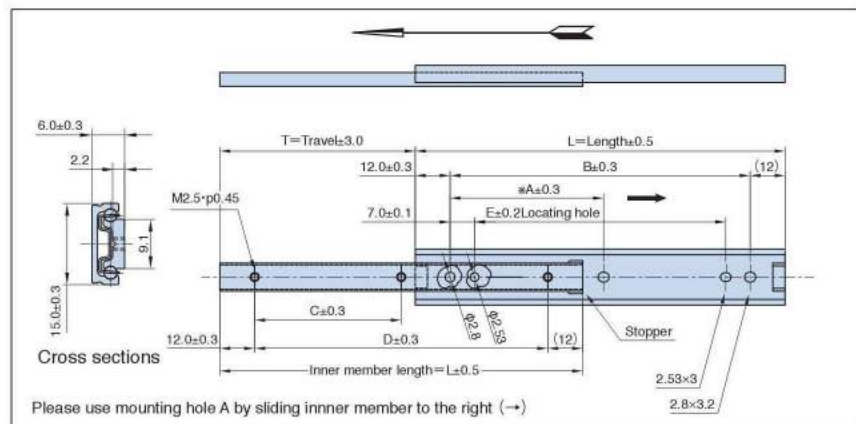

PART No.	Length L	Travel T	1530 Series Mounting holes (mm)					Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E			
1530-70	70	34	-	46	-	46	32	0.0100	-	8.8(4.0)
1530-100	100	44	38	76	38	76	62	0.0150	-	9.9(4.5)
1530-150	150	74	63	126	63	126	112	0.0225	-	8.8(4.0)


1540 Series

RoHS Compliant

- 3 Member

Specification

- Material / Aluminum alloy
- Finish / Anodizing
- Slide space / 11.0mm, Height / 15.0mm
- Load rating / 8.3~9.5lbs. (3.8~4.3kg)
- Mounting hole / $\phi 2.8$, 2.8×3.2
- Common in L / R

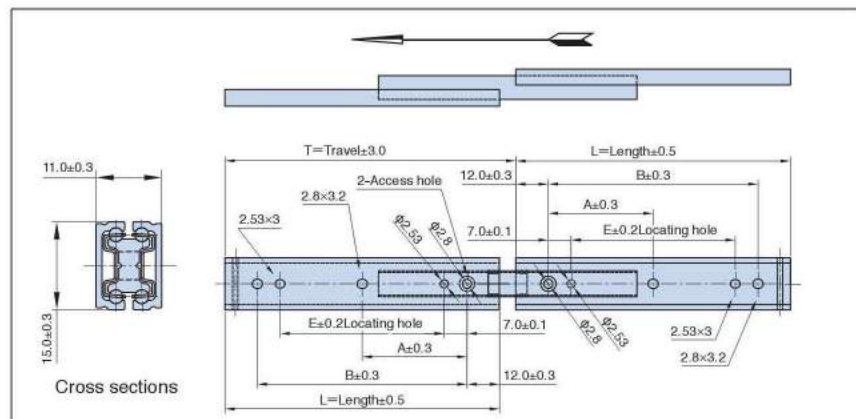

PART No.	Length L	Travel T	1540 Series Mounting holes (mm)					Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	E					
1540-80	80	78	-	56	42	-	-	0.0200	-	8.8(4.0)
1540-100	100	98	38	76	62	-	-	0.0255	-	9.5(4.3)
1540-150	150	158	63	126	112	-	-	0.0390	-	8.3(3.8)


1300S Series

RoHS Compliant


- 2 Member
- 3/4 travel

Specification

- Material / SUS304
- Slide space / 6.4mm, Height / 14.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M2.6 burring tap, $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

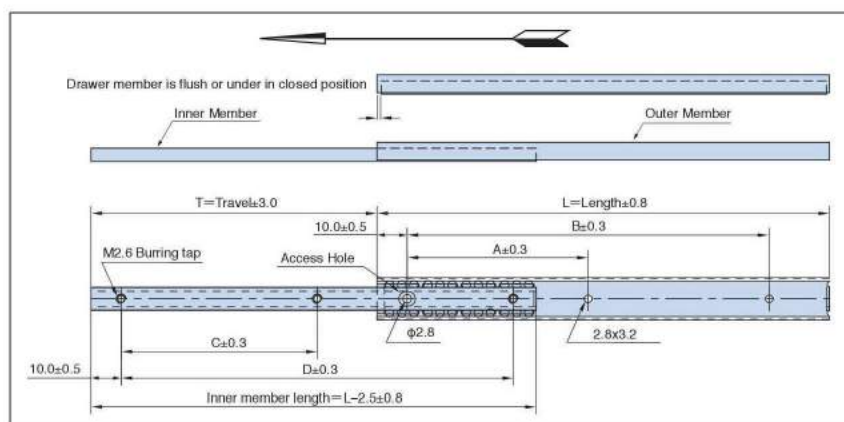

PART No.	Length L	Travel T	1300S Series Mounting Holes (mm)				Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D		
1300S-70	70	40.1	—	50	—	50	0.020	22 (10)
1300S-100	100	70.1	40	70	40	80	0.029	22 (10)
1300S-125	125	82.4	50	95	50	105	0.035	22 (10)
1300S-150	150	94.7	60	120	65	130	0.040	22 (10)


1400S Series

RoHS Compliant


- 3 Member
- Full Extension

Specification

- Material / SUS304
- Slide space / 12.8mm, Height / 14.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

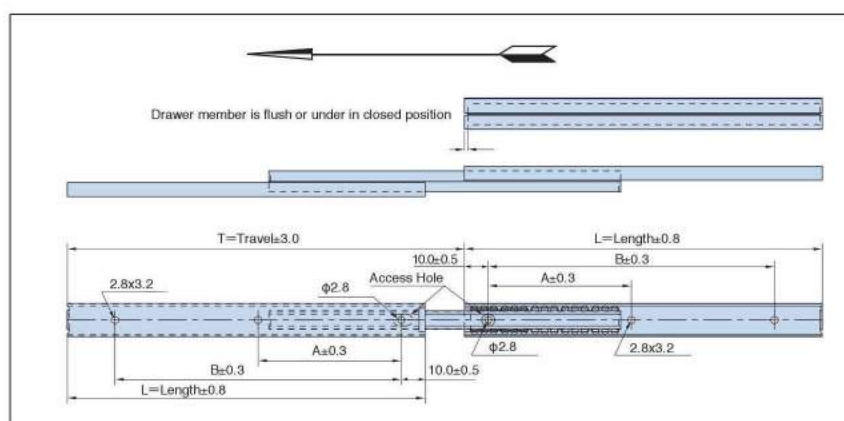

PART No.	Length L	Travel T	1400S Series Mounting Holes (mm)		Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B		
1400S-70	70	82.7	—	50	0.040	22 (10)
1400S-100	100	117.3	40	70	0.055	22 (10)
1400S-125	125	141.9	50	95	0.069	22 (10)
1400S-150	150	166.5	60	120	0.082	22 (10)


1390S Series

RoHS Compliant


- 2 Member
- Linear Motion

Specification

- Material / SUS304
- Slide space / 6.4mm, Height / 14.0mm
- Mounting hole / M2.6 burring tap
 $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

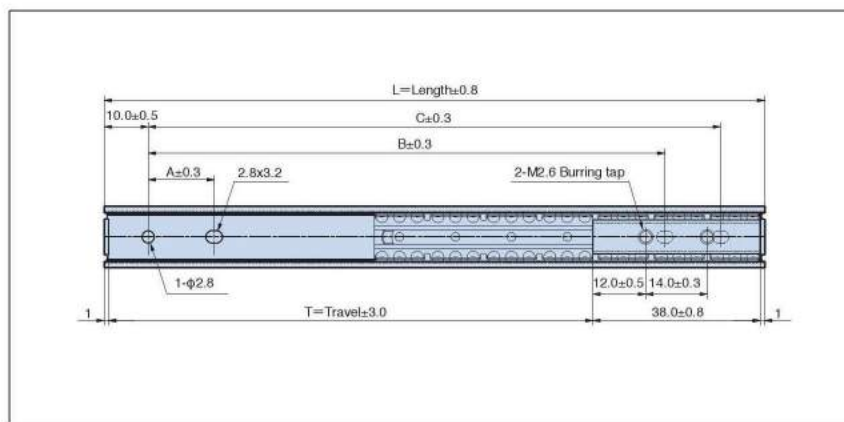

PART No.	Length L	Travel T	1390S Series Mounting Holes (mm)			Slide weight (kg/pc)
			A	B	C	
1390S-70	70	30	—	—	50	0.020
1390S-100	100	60	15	65	80	0.025
1390S-125	125	85	15	90	105	0.030
1390S-150	150	110	15	115	130	0.035


1395S Series

RoHS Compliant


- 2 Member
- Front / Rear Travel

Specification

- Material / SUS304
- Slide space / 6.4mm, Height / 14.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M2.6 burring tap
 $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

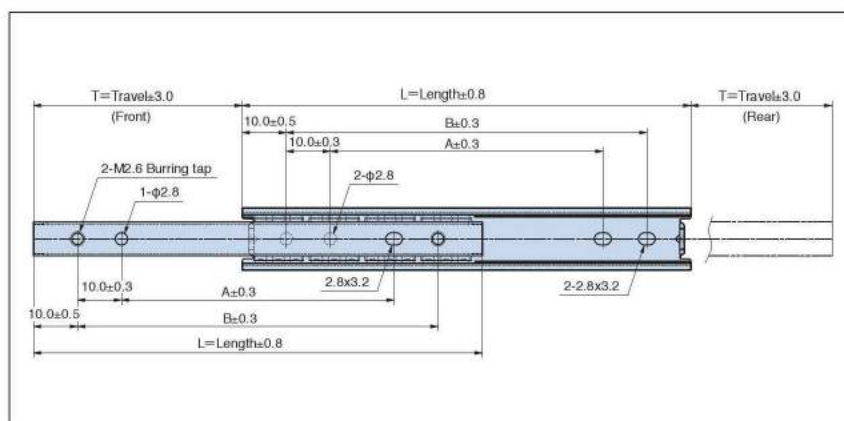

PART No.	Length L	Travel T	1395S Series Mounting Holes (mm)		Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B		
1395S-70	70	17.2	30	50	0.020	22 (10)
1395S-100	100	21.8	60	80	0.030	22 (10)
1395S-125	125	34.1	85	105	0.035	22 (10)
1395S-150	150	59.1	110	130	0.045	22 (10)


1500S Series

RoHS Compliant


- 2 Member
- 3/4 travel

Specification

- Material / SUS304
- Slide space / 7.5mm, Height / 16.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M3 burring tap
 $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R



Cross sections

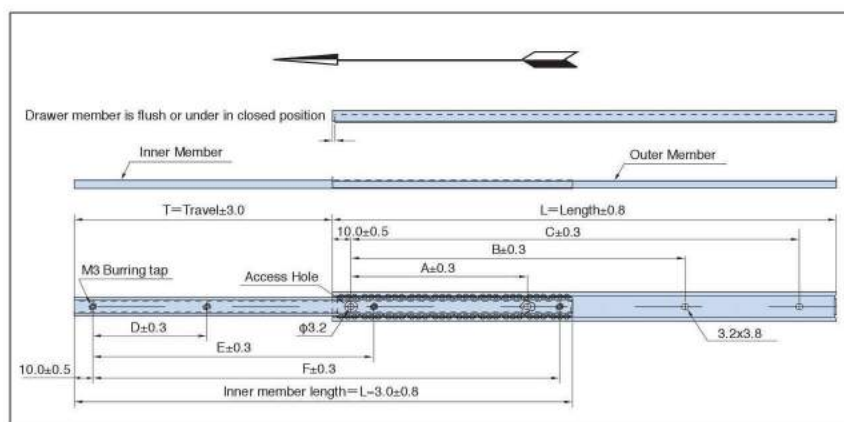

PART No.	Length L	Travel T	1500S Series Mounting Holes (mm)						Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D	E	F		
1500S-70	70	39.3	—	—	50	—	—	50	0.027	22 (10)
1500S-100	100	69.3	—	40	70	40	—	80	0.037	22 (10)
1500S-125	125	81.6	—	50	95	50	—	105	0.046	22 (10)
1500S-150	150	93.9	—	60	120	65	—	130	0.057	22 (10)
1500S-200	200	118.5	—	95	170	90	—	180	0.076	22 (10)
1500S-250	250	143.1	80	150	220	80	160	230	0.095	22 (10)
1500S-300	300	167.7	95	180	270	90	180	280	0.115	22 (10)


1600S Series

RoHS Compliant


- 3 Member
- Full Extension

Specification

- Material / SUS304
- Slide space / 15.0mm, Height / 16.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R



Cross sections

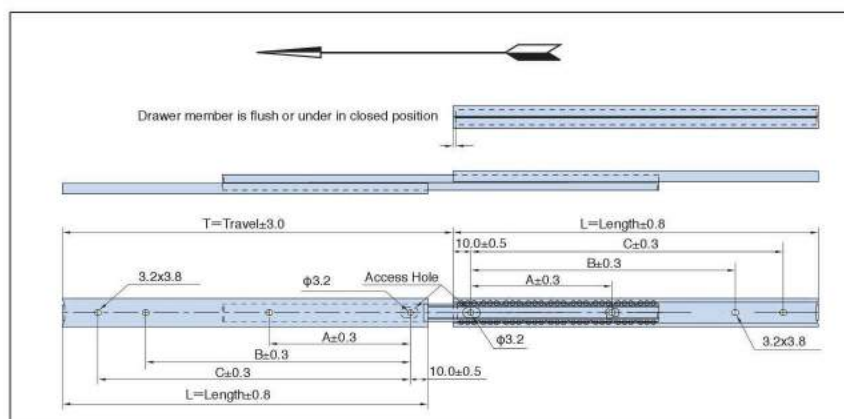

PART No.	Length L	Travel T	1600S Series Mounting Holes (mm)			Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C		
1600S-70	70	80.6	—	—	50	0.027	22 (10)
1600S-100	100	115.2	—	40	70	0.037	22 (10)
1600S-125	125	139.8	—	50	95	0.046	22 (10)
1600S-150	150	164.4	—	60	120	0.057	22 (10)
1600S-200	200	213.6	—	95	170	0.076	22 (10)
1600S-250	250	262.8	80	150	220	0.095	22 (10)
1600S-300	300	300	95	180	270	0.115	22 (10)


1590S Series

RoHS Compliant


- 2 Member
- Linear Motion

Specification

- Material / SUS304
- Slide space / 7.5mm, Height / 16.0mm
- Mounting hole / M3 burring tap,
 $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R



Cross sections

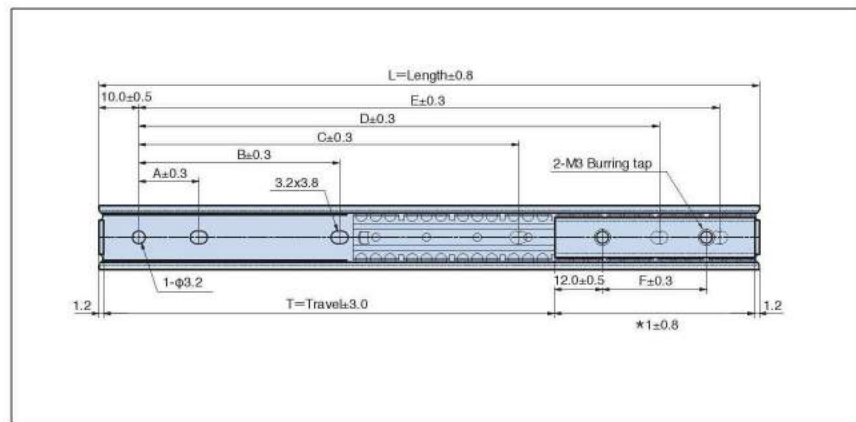

PART No.	Length L	Travel T	1590S Series Mounting Holes (mm)							Slide weight (kg/pc)
			*1	A	B	C	D	E	F	
1590S-70	70	29.6	38	—	—	—	—	50	14	0.025
1590S-100	100	59.6	38	15	—	—	65	80	14	0.030
1590S-125	125	84.6	38	15	—	—	90	105	14	0.040
1590S-150	150	109.6	38	15	—	—	115	130	14	0.045
1590S-200	200	147.6	50	15	—	—	165	180	26	0.060
1590S-300	300	247.6	50	15	90	190	265	280	26	0.080
1590S-400	400	347.6	50	15	130	250	365	380	26	0.105


1595S Series

RoHS Compliant


- 2 Member
- Front / Rear Travel
- Screw: M2.6 pan head screw

Specification

- Material / SUS304
- Slide space / 7.5mm, Height / 16.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / M3 burring tap,
 $\phi 3.2$, $\phi 3.2 \times 3.8$
- Common in L / R



Cross sections

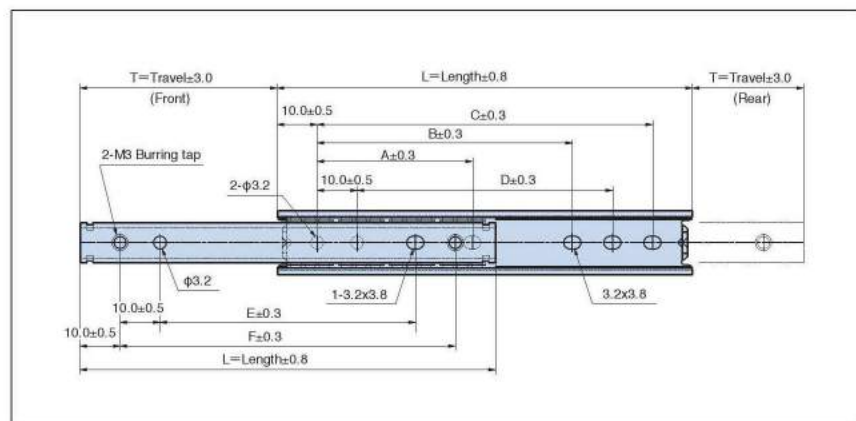

PART No.	Length L	Travel T	1595S Series Mounting Holes (mm)						Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D	E	F		
1595S-70	70	15.4	—	—	50	30	30	50	0.03	22 (10)
1595S-100	100	20.0	—	—	80	60	60	80	0.04	22 (10)
1595S-125	125	32.3	—	—	105	85	85	105	0.05	22 (10)
1595S-150	150	44.6	—	—	130	110	110	130	0.06	22 (10)
1595S-200	200	69.2	50	130	180	160	160	180	0.08	22 (10)


2000S Series

RoHS Compliant


- 3 Member
- Full Extension

Specification

- Material / SUS304
- Slide space / 10.5mm, Height / 20.0mm
- Load rating / 22lbs. (10kg)
- Mounting hole / $\phi 2.8$, $\phi 2.8 \times 3.2$
- Common in L / R



Cross sections

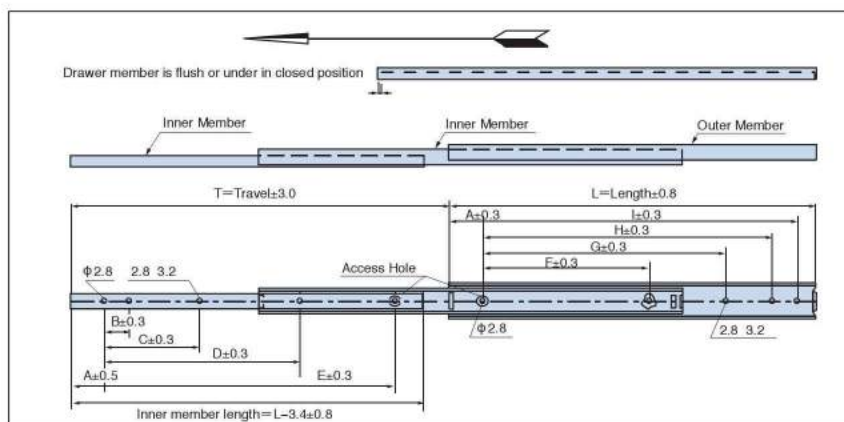

PART No.	Length L	Travel T	2000S Series Mounting Holes (mm)									Slide weight (kg/pc)	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	H	I		
2000S-70	70	81.0	10	—	—	—	50	—	—	50	—	0.045	22 (10)
2000S-100	100	115.6	10	—	40	—	80	—	40	80	—	0.065	22 (10)
2000S-125	125	140.2	20	—	40	—	80	—	40	80	—	0.082	22 (10)
2000S-150	150	164.8	20	—	50	—	110	—	50	110	—	0.098	22 (10)
2000S-200	200	214.0	20	15	60	—	160	—	100	145	160	0.132	22 (10)
2000S-250	250	263.2	20	15	60	160	210	50	145	195	210	0.165	22 (10)
2000S-300	300	312.4	20	15	100	160	260	100	160	245	260	0.200	22 (10)


[CAUTION] Length of Screw

Our microrails have extruded screw holes in order for customer to be able to assemble slide rail from one side (except for full extension types: 2000S, 1400S, 1600S).

If long screws were to be used, it would interfere with retainer or slide rail stopper, and it may cause damage.

Please make sure the length of screw before use. Recommended length of screw could be determined as following calculation.

Recommended length of screw (L) = (t) + (A) + (1~1.5) mm

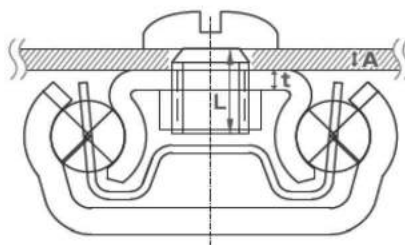

- Length of screw(L)
- Thickness of inner member(t)
1300S, 1400S: t=0.8mm
1500S, 1600S: t=1.0mm
- Thickness of object such as drawer (A)


1700 Series

RoHS Compliant

- 2 Member
- 3/4 travel

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 8.0mm, Height / 20.0mm
- Load rating / 33lbs. (15kg)
- Mounting hole / $\phi 3.2$, 3.2×3.8
- Common in L / R

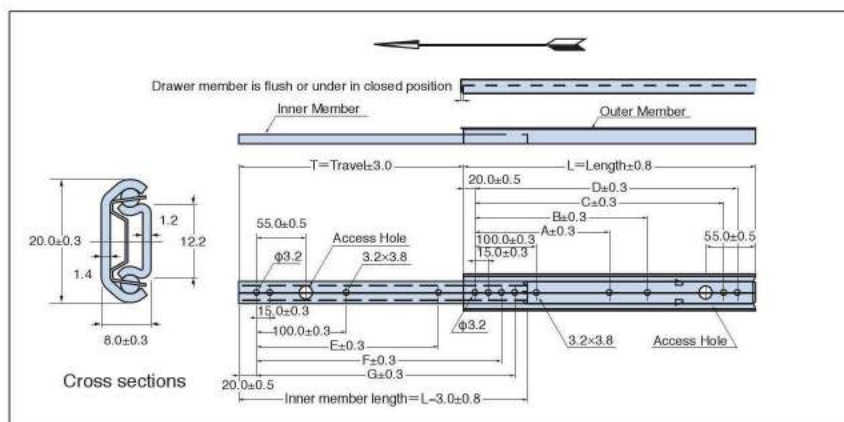

PART No.	Length L	Travel T	1700 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
1700-200	200	134	-	-	145	160	-	145	160	0.10	72	33(15)
1700-250	250	184	-	-	195	210	150	195	210	0.13	72	33(15)
1700-300	300	224	-	160	245	260	190	245	260	0.15	72	33(15)
1700-350	350	254	-	210	295	310	225	295	310	0.18	72	33(15)
1700-400	400	294	-	260	345	360	265	345	360	0.20	72	33(15)
1700-450	450	334	205	310	395	410	300	395	410	0.23	72	33(15)
1700-500	500	384	230	360	445	460	337	445	460	0.25	72	33(15)


1800 Series

RoHS Compliant

- 3 Member
- 29mm, 19mm Over travel

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 16.0mm, Height / 20.0mm
- Load rating / 33lbs. (15kg)
- Mounting hole / $\phi 3.2$, 3.2×3.8
- Common in L / R

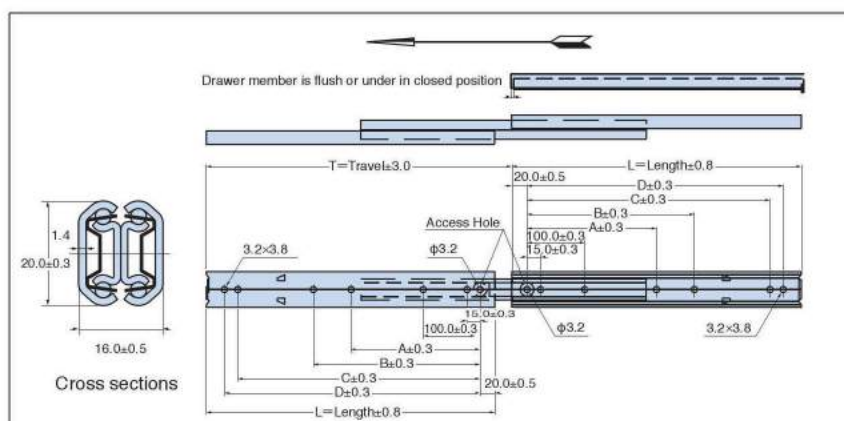

PART No.	Length L	Travel T	1800 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D						
1800-200	200	229	-	-	145	160	-	-	-	0.20	36	33(15)
1800-250	250	269	-	-	195	210	-	-	-	0.26	36	33(15)
1800-300	300	329	-	160	245	260	-	-	-	0.32	36	33(15)
1800-350	350	369	-	210	295	310	-	-	-	0.37	36	33(15)
1800-400	400	429	-	260	345	360	-	-	-	0.42	36	33(15)
1800-450	450	469	205	310	395	410	-	-	-	0.47	36	33(15)
1800-500	500	529	230	360	445	460	-	-	-	0.52	36	33(15)

RoHS Compliant


2300 Series

RoHS Compliant

- 2 Member
- 3/4 travel

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 9.5mm, Height / 27.0mm
- Load rating / 44~57lbs. (20~26kg)
- Mounting hole / $\phi 4.5$, 4.2x6.0
- Common in L / R

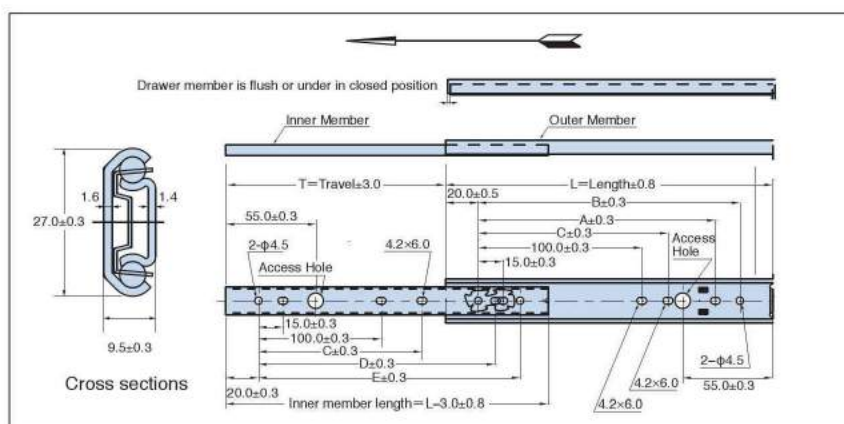

PART No.	Length L	Travel T	2300 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E					
IDS2300-200	200	134.4	145	160	-	145	160	-	-	0.16	60	53(24)
IDS2300-250	250	184.4	195	210	150	195	210	-	-	0.21	60	55(25)
IDS2300-300	300	221.7	245	260	190	245	260	-	-	0.24	60	57(26)
IDS2300-350	350	259.0	295	310	225	295	310	-	-	0.29	60	55(25)
IDS2300-400	400	296.3	345	360	265	345	360	-	-	0.33	60	53(24)
IDS2300-450	450	333.6	395	410	300	395	410	-	-	0.37	60	51(23)
IDS2300-500	500	370.9	445	460	337	445	460	-	-	0.41	60	44(20)


2400 Series

RoHS Compliant

- 3 Member
- Over travel
- Bumper

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 19.1mm, Height / 27.0mm
- Load rating / 62~82lbs. (28~37kg)
- Mounting hole / $\phi 4.5$, 4.2x6.0
- Common in L / R

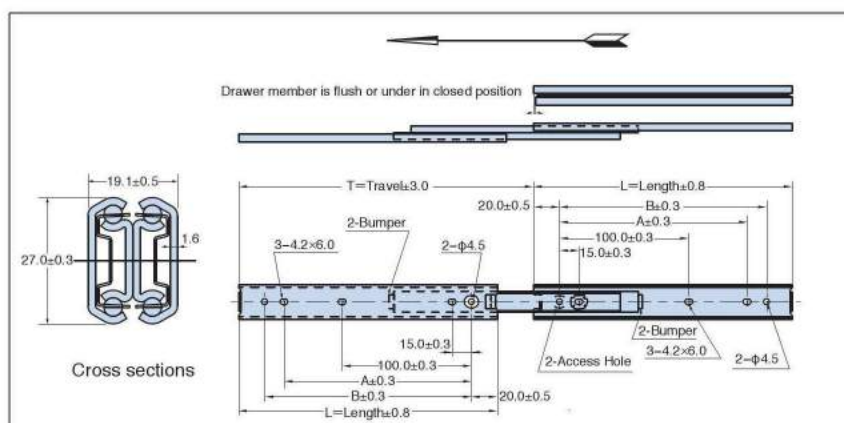

PART No.	Length L	Travel T	2400 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B								
IDS2400-200	200	228.7	145	160	-	-	-	-	-	0.33	30	77(35)
IDS2400-250	250	276.7	195	210	-	-	-	-	-	0.42	30	79(36)
IDS2400-300	300	326.7	245	260	-	-	-	-	-	0.50	30	82(37)
IDS2400-350	350	375.7	295	310	-	-	-	-	-	0.59	30	79(36)
IDS2400-400	400	425.7	345	360	-	-	-	-	-	0.68	30	75(34)
IDS2400-450	450	474.1	395	410	-	-	-	-	-	0.76	30	68(31)
IDS2400-500	500	523.1	445	460	-	-	-	-	-	0.85	30	62(28)

340 Series


RoHS Compliant

- 3 Member
- 0.88" Over travel

Material / Stainless steel (Custom made)

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 19.2mm, Height / 35.3mm
- Load rating / 91~106lbs. (41~48kg)
- Mounting hole / 4.5×5.2, 5.2×4.5
- Common in L / R

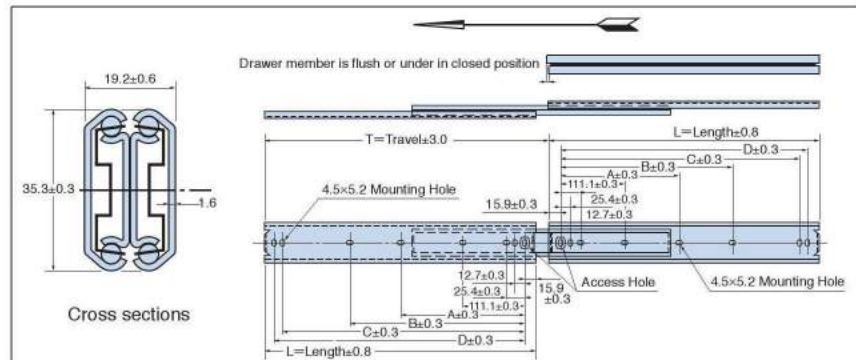

PART No.	Length L	Travel T	340 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
340-12	304.8 (12")	327.2 (12.88")	-	149.2	260.4	273.1	-	-	-	0.66	30	97(44)
340-14	355.6 (14")	378.0 (14.88")	-	200.0	311.2	323.9	-	-	-	0.77	30	102(46)
340-16	406.4 (16")	428.8 (16.88")	-	250.8	362.0	374.7	-	-	-	0.88	20	104(47)
340-18	457.2 (18")	479.6 (18.88")	212.7	301.6	412.8	425.5	-	-	-	1.05	20	106(48)
340-20	508.0 (20")	530.4 (20.88")	238.1	352.4	463.6	476.3	-	-	-	1.10	18	106(48)
340-22	558.8 (22")	581.2 (22.88")	263.5	403.2	514.4	527.1	-	-	-	1.22	16	104(47)
340-24	609.6 (24")	632.0 (24.88")	288.9	454.0	565.2	577.9	-	-	-	1.33	12	95(43)
340-26	660.4 (26")	682.8 (26.88")	314.3	504.8	616.0	628.7	-	-	-	1.44	12	93(42)
340-28	711.2 (28")	733.6 (28.88")	339.7	555.6	666.8	679.5	-	-	-	1.55	12	91(41)

340QDA Series


RoHS Compliant

- 3 Member
- 0.88" Over travel
- Front disconnect
- Detent open

Material / Stainless steel (Custom made)

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 19.2mm, Height / 35.3mm
- Load rating / 71~95lbs. (32~43kg)
- Mounting hole / 4.5×5.2, 5.2×4.5
- Common in L / R

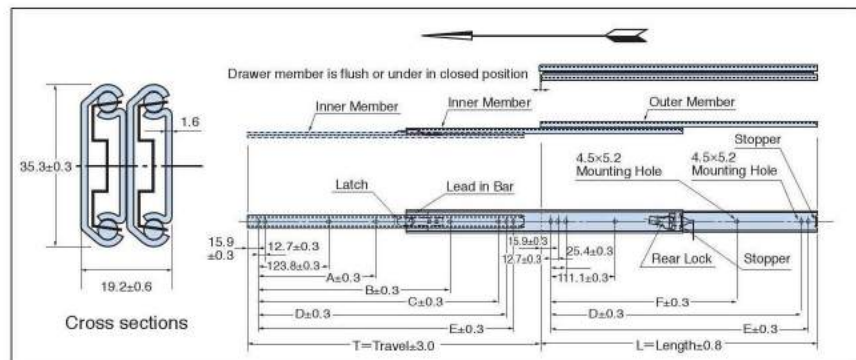

PART No.	Length L	Travel T	340QDA Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
340QDA-12	304.8 (12")	327.2 (12.88")	-	-	-	260.4	273.1	-	-	0.66	30	71(32)
340QDA-14	355.6 (14")	378.0 (14.88")	-	-	298.4	311.2	323.9	-	-	0.77	30	79(36)
340QDA-16	406.4 (16")	428.8 (16.88")	-	-	349.2	362.0	374.7	250.8	-	0.88	22	88(40)
340QDA-18	457.2 (18")	479.6 (18.88")	212.7	-	400.0	412.8	425.5	301.6	-	0.99	20	95(43)
340QDA-20	508.0 (20")	530.4 (20.88")	238.1	365.1	450.8	463.7	476.3	352.4	-	1.10	18	95(43)
340QDA-22	558.8 (22")	581.2 (22.88")	263.5	415.9	501.6	514.4	527.1	403.2	-	1.22	16	93(42)
340QDA-24	609.6 (24")	632.0 (24.88")	288.9	466.7	552.4	565.2	577.9	454.0	-	1.33	12	86(39)
340QDA-26	660.4 (26")	682.8 (26.88")	314.3	517.5	603.2	616.0	628.7	504.8	-	1.44	12	84(38)
340QDA-28	711.2 (28")	733.6 (28.88")	339.7	568.3	654.0	666.8	679.5	555.6	-	1.55	12	82(37)

330LMM Series


RoHS Compliant

- 2 Member
- Linear Motion

Material / Stainless steel (Custom made)

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 11.2mm, Height / 60.4mm
- Mounting hole / 4.5 5.2, 5.2 4.5
- Common in L / R

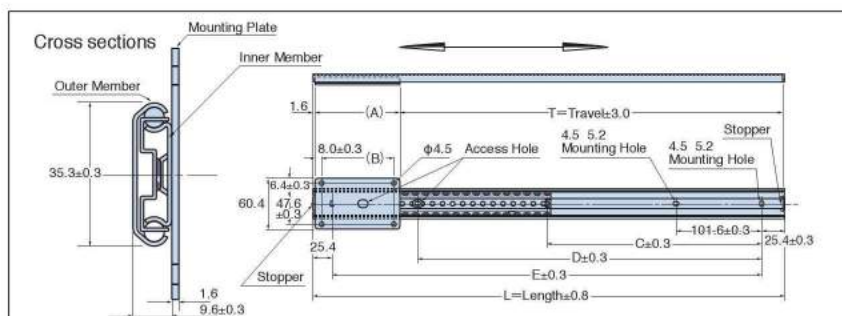

PART No.	Length L	330LMM Series Mounting holes (mm)								C	D	E	Slide weight (kg/pc)
		A											
		76.2	101.6	127.0	152.4	177.8	203.2						
		B											
		60.2	85.6	111.0	136.4	161.8	187.2						
Travel T													
330LMM-12	304.8 (12")	225.4	200.0	174.6	149.2	123.8	98.4	—	152.4	254.0	0.43		
330LMM-14	355.6 (14")	276.2	250.8	225.4	200.0	174.6	149.2	—	203.2	304.8	0.46		
330LMM-16	406.4 (16")	327.0	301.6	276.2	250.8	225.4	200.0	—	254.0	355.6	0.49		
330LMM-18	457.2 (18")	377.8	352.4	327.0	301.6	276.2	250.8	203.2	304.8	406.4	0.52		
330LMM-20	508.0 (20")	428.6	403.2	377.8	352.4	327.0	301.6	228.6	355.6	457.2	0.55		
330LMM-22	558.8 (22")	479.4	454.0	428.6	403.2	377.8	352.4	254.0	406.4	508.0	0.58		
330LMM-24	609.6 (24")	530.2	504.8	479.4	454.0	428.6	403.2	279.4	457.2	558.8	0.61		
330LMM-26	660.4 (26")	581.0	555.6	530.2	504.8	479.4	454.0	304.8	508.0	609.6	0.64		
330LMM-28	711.2 (28")	631.8	606.4	581.0	555.6	530.2	504.8	330.2	558.8	660.4	0.67		


2800 Series

RoHS Compliant

- 3 Member
- 0.4" Over travel

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 13.0mm, Height / 35.3mm
- Load rating / 66~75lbs. (30~34kg)
- Mounting hole / 4.5 5.3
- Common in L / R

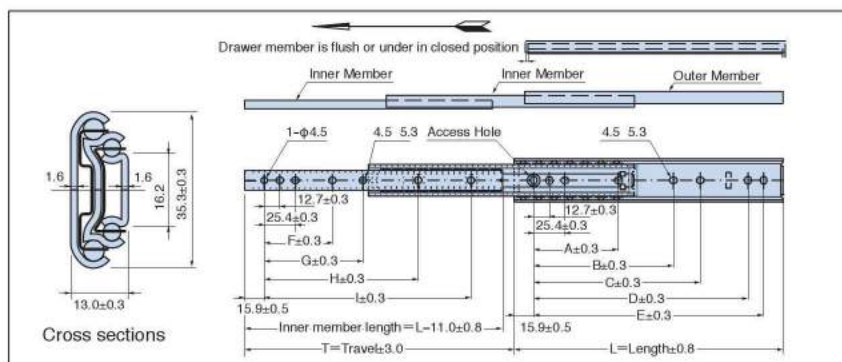

PART No.	Length L	Travel T	2800 Series Mounting holes (mm)										Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	H	I				
2800N- 8	203.2 (8")	214 (8.4")	111.1	-	-	158.7	171.4	50.8	-	-	152.4	-	0.29	30	66(30)
2800N-10	254.0 (10")	265 (10.4")	111.1	-	-	209.5	222.2	101.6	-	-	203.2	-	0.37	30	71(32)
2800N-12	304.8 (12")	316 (12.4")	111.1	-	149.2	260.3	273.0	101.6	-	152.4	254.0	-	0.44	30	71(32)
2800N-14	355.6 (14")	366 (14.4")	111.1	-	200.0	311.1	323.8	101.6	-	203.2	304.8	-	0.52	30	75(34)
2800N-16	406.4 (16")	417 (16.4")	111.1	-	250.8	361.9	374.6	101.6	-	254.0	355.6	-	0.60	30	75(34)
2800N-18	457.2 (18")	468 (18.4")	111.1	212.7	301.6	412.7	425.4	101.6	207.7	304.8	406.4	-	0.68	30	75(34)
2800N-20	508.0 (20")	519 (20.4")	111.1	238.1	352.4	463.5	476.2	101.6	233.1	355.6	457.2	-	0.76	30	75(34)
2800N-22	558.8 (22")	570 (22.4")	111.1	263.5	403.2	514.3	527.0	101.6	258.5	406.4	508.0	-	0.83	30	88(31)
2800N-24	609.6 (24")	620 (24.4")	111.1	288.9	454.0	565.1	577.8	101.6	283.9	457.2	558.8	-	0.92	16	66(30)


2880 Series

RoHS Compliant

- 3 Member
- Front disconnect
- Detent open

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 13.0mm, Height / 35.3mm
- Load rating / 66~75lbs. (30~34kg)
- Mounting hole / 4.5 5.3
- Common in L / R

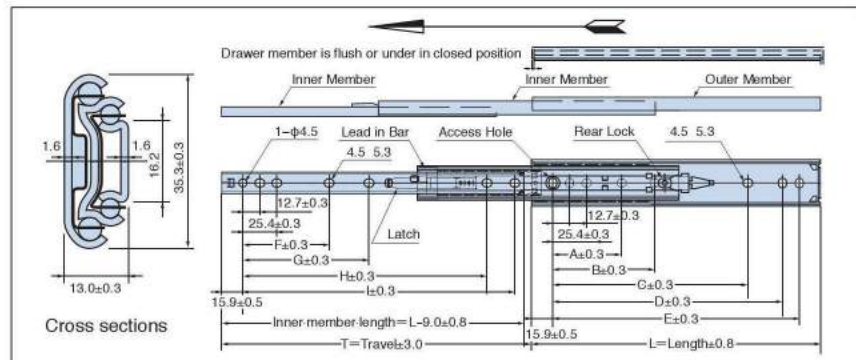

PART No.	Length L	Travel T	2880 Series Mounting holes (mm)										Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	H	I				
2880N-8	203.2 (8")	200 (7.9")	111.1	-	-	158.7	171.4	50.8	-	-	152.4		0.29	30	66(30)
2880N-10	254.0 (10")	250 (9.8")	111.1	-	-	209.5	222.2	101.6	-	-	203.2		0.37	30	71(32)
2880N-12	304.8 (12")	324 (12.8")	111.1	-	-	260.3	273.0	101.6	-	-	254.0		0.44	30	71(32)
2880N-14	355.6 (14")	378 (14.9")	111.1	-	200.0	311.1	323.8	101.6	-	-	304.8		0.52	30	75(34)
2880N-16	406.4 (16")	429 (16.9")	111.1	-	250.8	361.9	374.6	101.6	-	-	355.6		0.60	30	75(34)
2880N-18	457.2 (18")	487 (19.2")	111.1	212.7	301.6	412.7	425.4	101.6	207.7	-	406.4		0.68	30	75(34)
2880N-20	508.0 (20")	530 (20.9")	111.1	238.1	352.4	463.5	476.2	101.6	233.1	355.6	457.2		0.75	30	75(34)
2880N-22	558.8 (22")	581 (22.9")	111.1	263.5	403.2	514.3	527.0	101.6	258.5	406.4	508.0		0.84	30	68(31)
2880N-24	609.6 (24")	632 (24.9")	111.1	288.9	454.0	565.1	577.8	101.6	283.9	457.2	558.8		0.91	16	66(30)


2882 Series

RoHS Compliant

- 3 Member
- 0.4" Over travel
- Front disconnect

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 13.0mm, Height / 35.3mm
- Load rating / 66~75lbs. (30~34kg)
- Mounting hole / 4.5 5.3
- Common in L / R

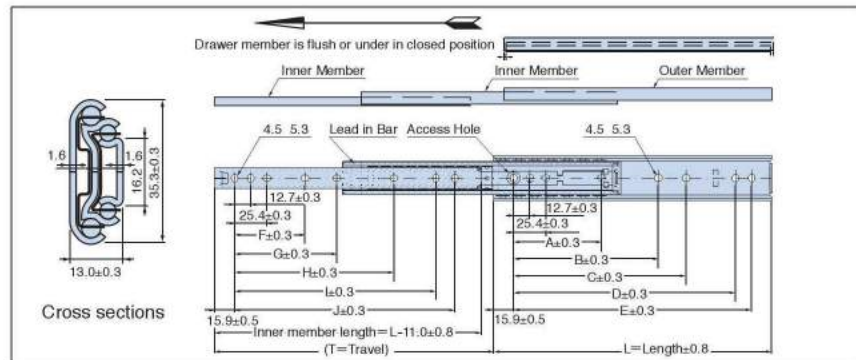

PART No.	Length L	Travel T	2882 Series Mounting holes (mm)										Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	H	I	J			
2882N-8	203.2 (8")	214 (8.4")	111.1	-	-	158.7	171.4	50.8	-	-	152.4	165.1	0.29	30	66(30)
2882N-10	254.0 (10")	265 (10.4")	111.1	-	-	209.5	222.2	101.6	-	-	203.2	215.9	0.37	30	71(32)
2882N-12	304.8 (12")	316 (12.4")	111.1	-	149.2	260.3	273.0	101.6	-	152.4	254.0	266.7	0.44	30	71(32)
2882N-14	355.6 (14")	366 (14.4")	111.1	-	200.0	311.1	323.8	101.6	-	203.2	304.8	317.5	0.52	30	75(34)
2882N-16	406.4 (16")	417 (16.4")	111.1	-	250.8	361.9	374.6	101.6	-	254.0	355.6	368.3	0.60	30	75(34)
2882N-18	457.2 (18")	468 (18.4")	111.1	212.7	301.6	412.7	425.4	101.6	207.7	304.8	406.4	419.1	0.68	30	75(34)
2882N-20	508.0 (20")	519 (20.4")	111.1	238.1	352.4	463.5	476.2	101.6	233.1	355.6	457.2	469.9	0.75	30	75(34)
2882N-22	558.8 (22")	570 (22.4")	111.1	263.5	403.2	514.3	527.0	101.6	258.5	406.4	508.0	520.7	0.84	30	68(31)
2882N-24	609.6 (24")	620 (24.4")	111.1	288.9	454.0	565.1	577.8	101.6	283.9	457.2	558.8	571.5	0.91	16	66(30)

3800 Series


RoHS Compliant

- 3 Member
- 1" Over travel
- With Sequential Motion (in front direction)
- Bumper

Long size available

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 12.7mm, Height / 50.8mm
- Load rating / 137~159lbs. (62~72kg)
- Mounting hole / $\phi 4.5$, 4.5x5.2
- Common in L / R

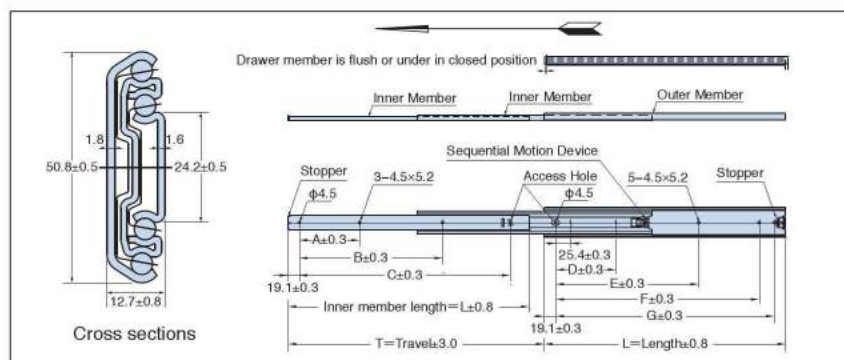

PART No.	Length L	Travel T	3800 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
3800-12	304.8(12")	330.2(13")	76.2	177.8	254.0	88.9	177.8	241.3	266.7	0.67	20	139(63)
3800-14	355.6(14")	381.0(15")	101.6	215.9	304.8	101.6	215.9	292.1	317.5	0.78	20	141(64)
3800-16	406.4(16")	431.8(17")	114.3	241.3	355.6	127.0	241.3	342.9	368.3	0.89	16	146(66)
3800-18	457.2(18")	482.6(19")	139.7	279.4	406.4	139.7	279.4	393.7	419.1	1.00	16	148(67)
3800-20	508.0(20")	533.4(21")	152.4	317.5	457.2	152.4	317.5	444.5	469.9	1.12	14	155(70)
3800-22	558.8(22")	584.2(23")	177.8	355.6	508.0	177.8	342.9	495.3	520.7	1.23	14	159(72)
3800-24	609.6(24")	635.0(25")	190.5	381.0	558.8	190.5	381.0	546.1	571.5	1.34	10	152(69)
3800-26	660.4(26")	685.8(27")	203.2	419.1	609.6	203.2	419.1	596.9	622.3	1.45	10	141(64)
3800-28	711.2(28")	736.6(29")	228.6	457.2	660.4	228.6	444.5	647.7	673.1	1.56	10	137(62)

3880 Series


RoHS Compliant

- 3 Member
- 1" Over travel
- Front disconnect
- Detent open

Long size available

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 12.7mm, Height / 50.8mm
- Load rating / 137~159lbs. (62~72kg)
- Mounting hole / $\phi 4.5$, 4.5x5.2
- Common in L / R

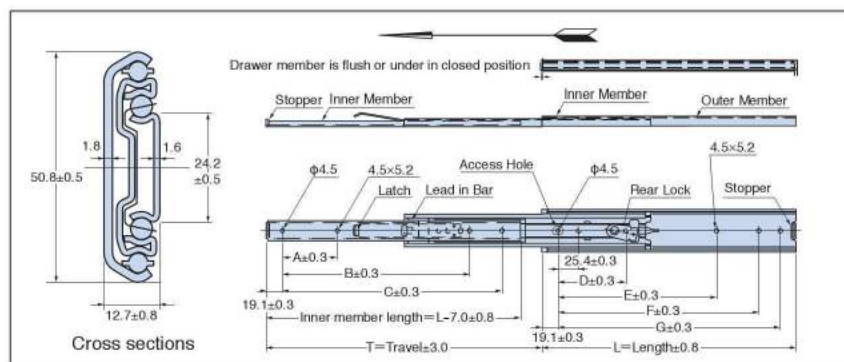

PART No.	Length L	Travel T	3880 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
3880-12	304.8(12")	330.2(13")	76.2	-	228.6	-	139.7	241.3	266.7	0.70	20	139(63)
3880-14	355.6(14")	381.0(15")	101.6	-	279.4	101.6	215.9	292.1	317.5	0.82	20	141(64)
3880-16	406.4(16")	431.8(17")	114.3	-	330.2	127.0	241.3	342.9	368.3	0.93	16	146(66)
3880-18	457.2(18")	482.6(19")	139.7	292.1	381.0	139.7	279.4	393.7	419.1	1.04	16	148(67)
3880-20	508.0(20")	533.4(21")	152.4	317.5	431.8	152.4	317.5	444.5	469.9	1.16	14	155(70)
3880-22	558.8(22")	584.2(23")	177.8	355.6	482.6	177.8	342.9	495.3	520.7	1.27	14	159(72)
3880-24	609.6(24")	635.0(25")	190.5	381.0	533.4	190.5	381.0	546.1	571.5	1.38	10	152(69)
3880-26	660.4(26")	685.8(27")	203.2	419.1	584.2	203.2	419.1	596.9	622.3	1.49	10	141(64)
3880-28	711.2(28")	736.6(29")	228.6	457.2	635.0	228.6	444.5	647.7	673.1	1.60	10	137(62)


5500 Series

RoHS Compliant

- 3 Member
- Over travel

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 16.0mm, Height / 54.8mm
- Load rating / 159~220lbs. (72~100kg)
- Mounting hole / $\phi 4.5$, 4.5×5.3
- Common in L / R

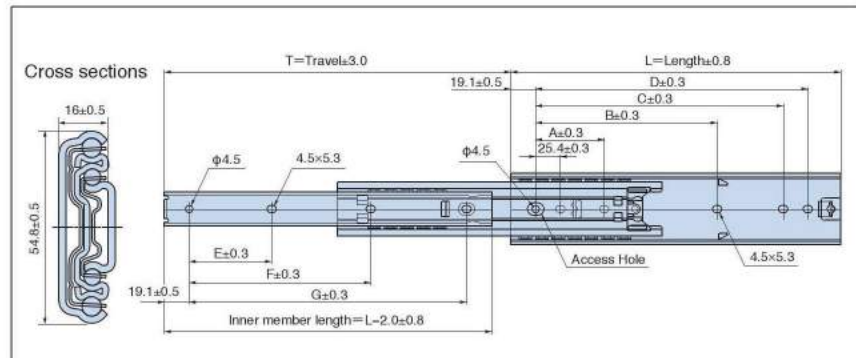

PART No.	Length L	Travel T	5500 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
5500-12	304.8(12")	330(13")	76.2	190.5	241.3	260.3	76.2	177.8	258.3	0.84	15	159(72)
5500-14	355.6(14")	381(15")	88.9	215.9	292.1	311.1	101.6	203.2	309.1	0.99	15	170(77)
5500-16	406.4(16")	432(17")	127.0	241.3	342.9	361.9	127.0	228.6	359.9	1.13	15	183(83)
5500-18	457.2(18")	483(19")	127.0	292.1	393.7	412.7	127.0	279.4	410.7	1.28	15	200(91)
5500-20	508.0(20")	533(21")	152.4	317.5	444.5	463.5	152.4	304.8	461.5	1.43	15	216(98)
5500-22	558.8(22")	584(23")	177.8	342.9	495.3	514.3	177.8	330.2	512.3	1.58	15	220(100)
5500-24	609.6(24")	635(25")	177.8	393.7	546.1	565.1	177.8	381.0	563.1	1.73	15	216(98)
5500-26	660.4(26")	686(27")	203.2	419.1	596.9	615.9	203.2	406.4	613.9	1.88	15	216(98)

5800 Series


RoHS Compliant

- 3 Member
- 1" Over travel
- With Sequential motion
(in front direction)

Long size available

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 16.0mm, Height / 63.0mm
- Load rating / 177~298lbs. (80~135kg)
- Mounting hole / $\phi 5.3$, 5.5×6.3
- Common in L / R

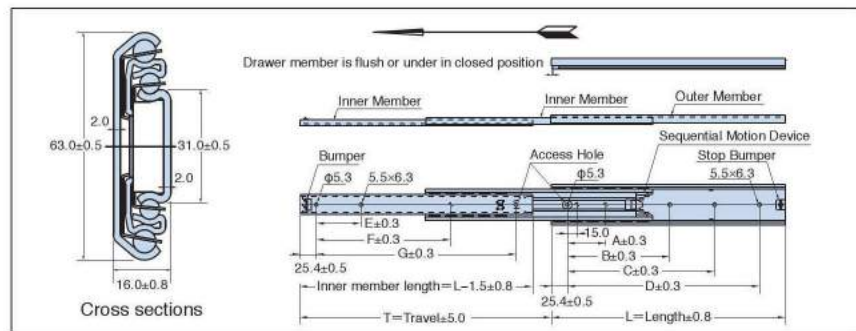

PART No.	Length L	Travel T	5800 Series Mounting holes (mm)							Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G			
5800-12	304.8(12")	331.0(13")	127.0	-	-	254.0	84.6	169.4	254.0	0.97	12	177(80)
5800-14	355.6(14")	381.0(15")	152.4	-	-	304.8	101.6	203.2	304.8	1.1	12	199(90)
5800-16	406.4(16")	432.0(17")	88.9	177.8	266.7	355.6	118.6	237.0	355.6	1.36	12	241(109)
5800-18	457.2(18")	483.0(19")	101.6	203.2	304.8	406.4	135.4	271.0	406.4	1.50	12	254(115)
5800-20	508.0(20")	534.0(21")	114.3	228.6	342.9	457.2	152.4	304.8	457.2	1.67	12	276(125)
5800-22	558.8(22")	585.0(23")	127.0	254.0	381.0	508.0	169.4	338.6	508.0	1.84	12	276(125)
5800-24	609.6(24")	635.0(25")	139.7	279.4	419.1	558.8	186.2	372.6	558.8	2.00	6	276(125)
5800-26	660.4(26")	686.0(27")	152.4	304.8	457.2	609.6	203.2	406.4	609.6	2.21	6	298(135)
5800-28	711.2(28")	737.0(29")	165.1	330.2	495.3	660.4	220.2	440.2	660.4	2.33	6	276(125)
5800-30	762.0(30")	788.0(31")	177.8	355.6	533.4	711.2	237.0	474.2	711.2	2.36	6	221(100)

9800 Series


RoHS Compliant

- 3 Member
- Equal travel

UNDER DEVELOPMENT

Specification

- Material / SPCC
- Finish / Electro zinc plate with clear
- Slide space / 19.8mm, Height / 69.8mm
- Load rating / 398lbs. (180kg)
- Mounting hole / $\phi 5.2$, $\phi 6.6$, $\phi 7.1$,
12.7 $\times$ 6.6, 15.9 $\times$ 6.6, 5.2 $\times$ 9.5
- Common in L / R

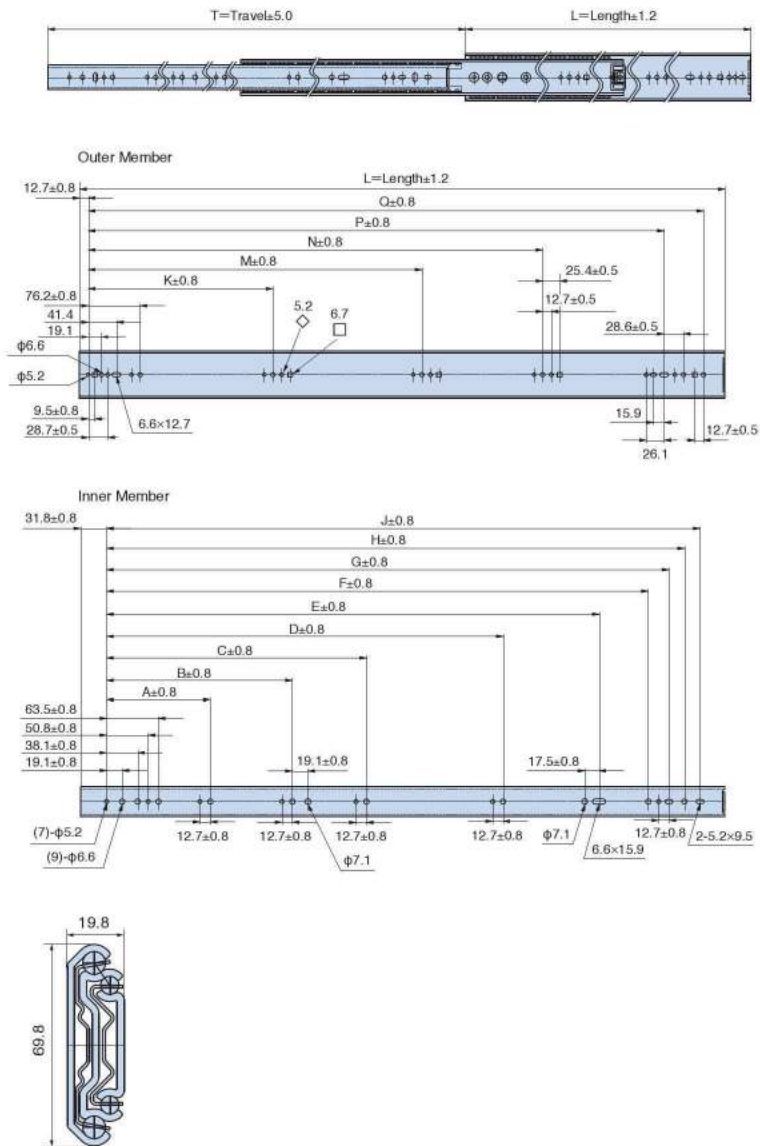

Cross sections

PART No.	Length L	Travel T	9800 Series Mounting holes (mm)														Slide weight (kg/pc)	Number in a box	Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	H	J	K	M	N	P	Q			
9800-20	508.0 (20")	508.0 (20")	127.0	190.5	—	—	296.9	357.1	382.5	401.6	420.6	—	—	—	406.4	463.6	2.40	6	397(180)
9800-22	558.8 (22")	559.0 (22")	127.0	190.5	—	—	347.7	407.9	433.3	452.4	471.4	—	—	—	457.2	514.4	2.65	6	397(180)
9800-24	609.6 (24")	610.0 (24")	127.0	190.5	—	—	398.5	458.7	484.1	503.2	522.2	—	—	—	508.0	565.2	2.90	6	397(180)
9800-26	660.4 (26")	660.0 (26")	127.0	190.5	—	—	449.3	509.5	534.9	554.0	573.0	—	—	—	558.8	616.0	3.01	6	397(180)
9800-28	711.2 (28")	711.0 (28")	127.0	190.5	—	—	500.1	560.3	585.7	604.8	623.8	—	—	—	609.6	666.8	3.50	4	397(180)
9800-30	762.0 (30")	762.0 (30")	127.0	190.5	368.3	—	550.9	611.1	636.5	655.6	674.6	234.9	—	501.7	660.4	717.6	3.60	4	397(180)
9800-32	812.8 (32")	813.0 (32")	127.0	190.5	368.3	—	601.7	661.9	687.3	706.4	725.4	234.9	393.7	552.5	711.2	768.4	3.85	4	397(180)
9800-34	863.6 (34")	864.0 (34")	127.0	190.5	368.3	469.9	652.5	712.7	738.1	757.2	776.2	234.9	419.1	603.3	762.0	819.2	4.05	4	397(180)
9800-36	914.4 (36")	914.0 (36")	127.0	190.5	368.3	520.7	703.3	763.5	788.9	808.0	827.0	234.9	444.5	654.1	812.8	870.0	4.30	4	397(180)
9800-38	965.2 (38")	964.0 (38")	127.0	190.5	368.3	520.7	754.1	814.3	839.7	858.8	877.8	234.9	469.9	704.9	863.6	920.8	4.55	4	397(180)


250 Series

RoHS Compliant

- 3 Member
- 1" Over travel
- C Lock (Option)
- With Sequential motion in front direction (Option)

Specification

- Material / High tensile strength aluminium
- Finish / Rigid alumite treatment
- Slide space / 19.0mm, Height / 70.0mm
- Load rating / 188~260lbs. (85~118kg)
- Mounting hole / $\phi 5.3 \times \phi 10.6 \times 90^\circ$ Counter sink
- Common in L / R

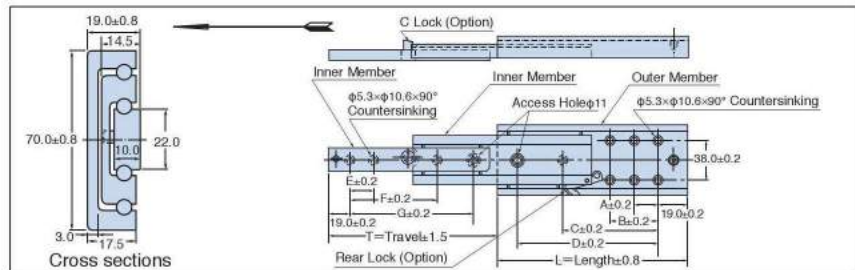

PART No.	Length L	Travel T	250 Series Mounting holes (mm)							Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	
250-12	304.8(12")	330.2(13")	98.0	-	-	254.0	50.8	177.8	254.0	230 (104)
250-14	355.6(14")	381.0(15")	127.0	-	-	304.8	76.2	203.2	304.8	234 (106)
250-16	406.4(16")	431.8(17")	76.2	152.4	254.0	355.6	101.6	228.6	355.6	243 (110)
250-18	457.2(18")	482.6(19")	76.2	152.4	279.4	406.4	127.0	279.4	406.4	254 (115)
250-20	508.0(20")	533.4(21")	98.0	203.2	330.2	457.2	152.4	304.8	457.2	260 (118)
250-22	558.8(22")	584.2(23")	98.0	203.2	355.6	508.0	177.8	330.2	508.0	260 (118)
250-24	609.6(24")	635.0(25")	127.0	254.0	406.4	558.8	177.8	381.0	558.8	256 (116)
250-26	660.4(26")	685.8(27")	127.0	254.0	431.8	609.6	203.2	406.4	609.6	238 (108)
250-28	711.2(28")	736.6(29")	152.4	304.8	482.6	660.4	228.6	431.8	660.4	221(100)
250-30	762.0(30")	787.4(31")	152.4	304.8	508.0	711.2	228.6	482.6	711.2	208 (94)
250-32	812.8(32")	838.2(33")	177.8	355.6	558.8	762.0	254.0	508.0	762.0	199 (90)
250-34	863.6(34")	889.0(35")	177.8	355.6	584.2	812.8	279.4	533.4	812.8	192 (87)
250-36	914.4(36")	939.8(37")	203.2	406.4	635.0	863.6	279.4	584.2	863.6	188 (85)


350 Series

RoHS Compliant

- 3 Member
- 1" Over travel
- E Lock (Option)
- With Sequential motion in front direction (Option)

Specification

- Material / High tensile strength aluminium
- Finish / Rigid alumite treatment
- Slide space / 25.4mm, Height / 89.0mm
- Load rating / 331~375lbs. (150~170kg)
- Mounting hole / $\phi 5.3 \times \phi 10.6 \times 90^\circ$ Counter sink
- Common in L / R

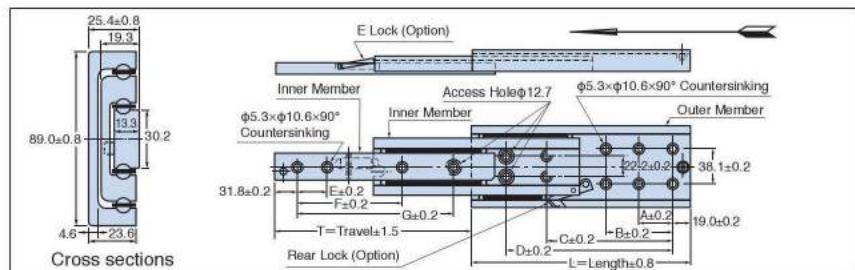

PART No.	Length L	Travel T	350 Series Mounting holes (mm)							Load rating lbs. (kg)/pair
			A	B	C	D	E	F	G	
350-12	304.8(12")	279.4(11")	101.6	-	-	254.0	-	127.0	228.6	342 (155)
350-14	355.6(14")	330.2(13")	127.0	-	-	304.8	76.2	177.8	279.4	353 (160)
350-16	406.4(16")	381.0(15")	76.2	152.4	254.0	355.6	101.6	203.2	330.2	364 (165)
350-18	457.2(18")	431.8(17")	76.2	152.4	279.4	406.4	127.0	254.0	381.0	371 (168)
350-20	508.0(20")	482.6(19")	101.6	203.2	330.2	457.2	127.0	279.4	431.8	375 (170)
350-22	558.8(22")	533.4(21")	101.6	203.2	355.6	508.0	152.4	304.8	482.6	375 (170)
350-24	609.6(24")	584.2(23")	127.0	254.0	406.4	558.8	177.8	355.6	533.4	371 (168)
350-26	660.4(26")	635.0(25")	127.0	254.0	431.8	609.6	177.8	381.0	584.2	364 (165)
350-28	711.2(28")	685.8(27")	152.4	304.8	482.6	660.4	203.2	406.4	635.0	353 (160)
350-30	762.0(30")	736.6(29")	152.4	304.8	508.0	711.2	228.6	457.2	685.8	349 (158)
350-32	812.8(32")	787.4(31")	177.8	355.6	558.8	762.0	228.6	482.6	736.6	344 (156)
350-34	863.6(34")	838.2(33")	177.8	355.6	584.2	812.8	254.0	508.0	787.4	340 (154)
350-36	914.4(36")	889.0(35")	203.2	406.4	635.0	863.6	279.4	558.8	838.2	331 (150)

Roller Pack


RoHS Compliant

-R25- Aluminum Linear Motion Systems

Providing smooth & silent movement with wet area usage ability.

Storage Use : Slide rails for Furniture, Kitchen, etc.

Linear Motion Use : Medical Equipment, Gaming Machine, etc.

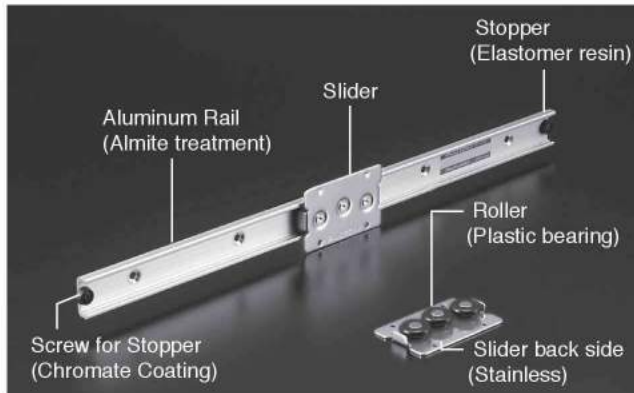

< Order >

2 - R25 - 160L

① ② ③

① Slider qty (No need to describe if only "1")

② Type of roller pack


③ Rail length

< Rail Dimension >

Part No.	Length L mm	Travel T mm	A mm	B	Weight (40g)
R25-160L	160	80	40	1	72
R25-240L	240	160	40	2	88
R25-320L	320	240	40	3	104
R25-400L	400	320	40	4	120
R25-480L	480	400	40	5	136
R25-560L	560	480	40	6	152
R25-640L	640	560	40	7	168
R25-720L	720	640	40	8	188
R25-800L	800	720	40	9	200
R25-880L	880	800	40	10	216
R25-960L	960	880	40	11	232
R25-1040L	1040	960	40	12	248
R25-1200L	1200	1120	40	14	280


* Weight is calculated in 1 slider.

* Weight of the slider plate individual is 40 g.

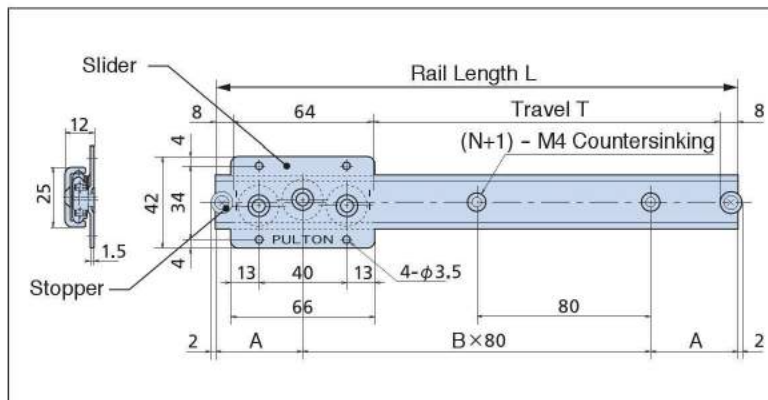

Part Name	Material	Surface Finish
Rail	Aluminum Alloy	White Almite Treatment
Slider Plate	304SS	—
Roller	Polyacetal(POM)	—

Allowable Load (condition without bending moment)

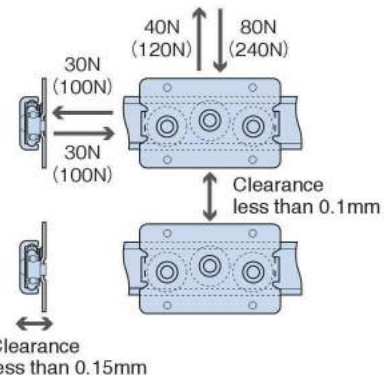

SI unit 1N=0.102kgf
Amount in () is static allowable load.

Roller Pack


RoHS Compliant

-R40- Steel Linear Motion Systems

Providing smooth & silent movement with wet area usage ability.

Storage Use : Slide rails for Furniture, Kitchen, etc.

Linear Motion Use : Medical Equipment, Gaming Machine, etc.

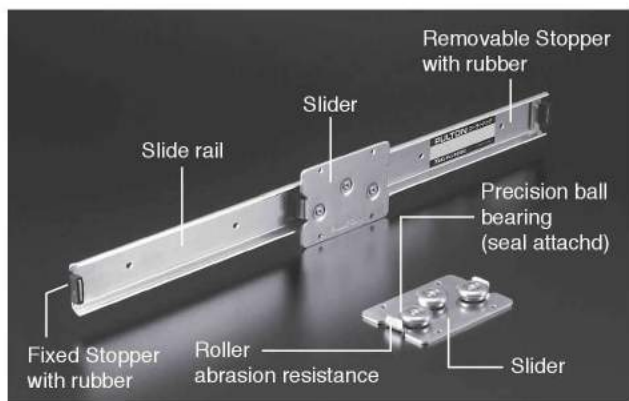

< Order >

2 - R40 U - 300L

① ② ③ ④

- ① Slider qty (No need to describe if only "1")
- ② Type of roller pack
- ③ Dust-proof Seal (No need to describe if not needed)
- ④ Rail length

< Rail Dimension >

Part No.	Length L mm	Travel T mm	A mm	B	Weight (170g)
R40-300L	300	200	50	2	400
R40-350L	350	250	25	3	440
R40-400L	400	300	50	3	480
R40-450L	450	350	25	4	520
R40-500L	500	400	50	4	560
R40-550L	550	450	25	5	590
R40-600L	600	500	50	5	630
R40-650L	650	550	25	6	670
R40-700L	700	600	50	6	700
R40-750L	750	650	25	7	740
R40-800L	800	700	50	7	770
R40-900L	900	800	50	8	850
R40-1000L	1000	900	50	9	920
R40-1200L	1200	1100	50	11	1070
R40-1500L	1500	1400	50	14	1280
R40-1800L	1800	1700	50	17	1490
T40-800L	800	—	50	7	600

Part Name	Material	Surface Finish
Rail	SPCC	Trivalent Chromate
Slider Plate	SPCC	Trivalent Chromate
Roller	SMF5040	—


U shaped Dust-proof seal (Optional)

In this case, the slider's travel decrease for 2mm.




T40-800L

Joint rail enables to have free selection of length

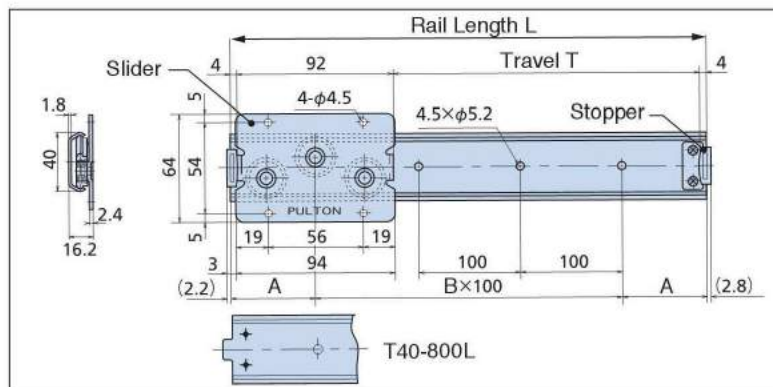

Allowable Load (condition without bending moment)

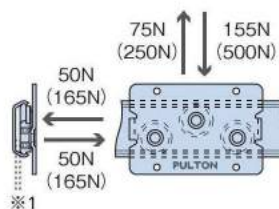

SI unit 1N=0.102kgf
Amount in () is static allowable load.